

---

# Qtile Documentation

*Release 0.12.0*

**Aldo Cortesi**

**Jul 21, 2018**



---

## Contents

---

<b>1</b>	<b>Getting started</b>	<b>1</b>
1.1	Installing Qtile . . . . .	1
1.2	Configuration . . . . .	4
<b>2</b>	<b>Commands and scripting</b>	<b>21</b>
2.1	Commands API . . . . .	21
2.2	Scripting . . . . .	24
2.3	qshell . . . . .	24
2.4	iqshell . . . . .	26
2.5	qtile-top . . . . .	27
2.6	qtile-run . . . . .	27
2.7	qtile-cmd . . . . .	27
2.8	dqtile-cmd . . . . .	30
<b>3</b>	<b>Getting involved</b>	<b>33</b>
3.1	Contributing . . . . .	33
3.2	Hacking on Qtile . . . . .	35
<b>4</b>	<b>Miscellaneous</b>	<b>39</b>
4.1	Reference . . . . .	39
4.2	Frequently Asked Questions . . . . .	99
4.3	License . . . . .	100



# CHAPTER 1

---

## Getting started

---

### 1.1 Installing Qtile

#### 1.1.1 Distro Guides

Below are the preferred installation methods for specific distros. If you are running something else, please see [Installing From Source](#).

##### Installing on Arch Linux

Stable versions of Qtile are currently packaged for Arch Linux. To install this package, run:

```
pacman -S qtile
```

Please see the ArchWiki for more information on [Qtile](#).

##### Installing on Fedora

Stable versions of Qtile are currently packaged for current versions of Fedora. To install this package, run:

```
dnf -y install qtile
```

##### Installing on Funtoo

Latest versions of Qtile are available on Funtoo with Python 2.7, 3.4, and 3.5 implementations. To install it, run:

```
emerge -av x11-wm/qtile
```

You can also install the development version from GitHub:

```
echo "x11-wm/qtile-9999 **" >> /etc/portage/package.accept_keywords
emerge -av qtile
```

### Customize

You can customize your installation with the following useflags:

- dbus
- widget-khal-calendar
- widget-imap
- widget-keyboardkbdd
- widget-launchbar
- widget-mdp
- widget-mpris
- widget-wlan

The dbus useflag is enabled by default. Disable it only if you know what it is and know you don't use/need it.

All widget-\* useflags are disabled by default because these widgets require additional dependencies while not everyone will use them. Enable only widgets you need to avoid extra dependencies thanks to these useflags.

Visit [Funtoo Qtile documentation](#) for more details on Qtile installation on Funtoo.

### Installing on Debian or Ubuntu

On recent Ubuntu (17.04 Zesty+) and Debian unstable (Sid) versions, there are Qtile packages available via:

```
sudo apt-get install qtile
```

On older versions of Ubuntu (Wily+) and Debian testing (Stretch), the dependencies are available via:

```
sudo apt-get install python3-xcffib python3-cairocffi
```

### Installing on Slackware

Qtile is available on the [SlackBuilds.org](#) as:

Package Name	Description
qtile	stable branch (release)

### Using slpkg (third party package manager)

The easy way to install Qtile is with [slpkg](#). For example:

```
slpkg -s sbo qtile
```

## Manual installation

Download dependencies first and install them. The order in which you need to install is:

- pycparser
- cffi
- six
- futures
- python-xcffib
- trollius
- cairocffi
- qtile

Please see the HOWTO for more information on [SlackBuild Usage HOWTO](#).

### 1.1.2 Installing From Source

First, you need to install all of Qtile's dependencies (although some are optional/not needed depending on your Python version, as noted below).

Note that Python 3 versions 3.4 and newer are currently supported and tested.

#### xcffib

Qtile uses [xcffib](#) as an XCB binding, which has its own instructions for building from source. However, if you'd like to skip building it, you can install its dependencies, you will need libxcb and libffi with the associated headers (libxcb-render0-dev and libffi-dev on Ubuntu), and install it via PyPI:

```
pip install xcffib
```

#### cairocffi

Qtile uses [cairocffi](#) with XCB support via xcffib. You'll need libcairo2, the underlying library used by the binding. You should be sure before you install cairocffi that xcffib has been installed, otherwise the needed cairo-xcb bindings will not be built. Once you've got the dependencies installed, you can use the latest version on PyPI:

```
pip install cairocffi
```

#### pangocairo

You'll also need libpangocairo, which on Ubuntu can be installed via sudo apt-get install libpangocairo-1.0-0. Qtile uses this to provide text rendering (and binds directly to it via cffi with a small in-tree binding).

### asyncio/trollius

Qtile uses the `asyncio` module as introduced in [PEP 3156](#) for its event loop. Based on your Python version, there are different ways to install this:

- Python >=3.4: The `asyncio` module comes as part of the standard library, so there is nothing more to install.
- Python 3.3: This has all the infrastructure needed to implement PEP 3156, but the `asyncio` module must be installed from the [Tulip project](#). This is done by calling:

```
pip install asyncio
```

Alternatively, you can install `trollius` (see next point). Note, however, that `trollius` is deprecated, and it is recommended that you use `tulip`, as `trollius` will likely be dropped if (and when) Python 2 support is dropped.

- Python 2 (and 3.3 without `asyncio`): You will need to install `trollius`, which backports the `asyncio` module functionality to work without the infrastructure introduced in PEP 3156. You can install this from PyPI:

```
pip install trollius
```

### dbus/gobject

Until someone comes along and writes an `asyncio`-based `dbus` library, qtile will depend on `python-dbus` to interact with `dbus`. This means that if you want to use things like notification daemon or `mpris` widgets, you'll need to install `python-gobject` and `python-dbus`. Qtile will run fine without these, although it will emit a warning that some things won't work.

### Qtile

With the dependencies in place, you can now install qtile:

```
git clone git://github.com/qtile/qtile.git
cd qtile
sudo python setup.py install
```

Stable versions of Qtile can be installed from PyPI:

```
pip install qtile
```

As long as the necessary libraries are in place, this can be done at any point, however, it is recommended that you first install `xcffib` to ensure the `cairo-xcb` bindings are built (see above).

## 1.2 Configuration

Qtile is configured in Python. A script (`~/.config/qtile/config.py` by default) is evaluated, and a small set of configuration variables are pulled from its global namespace.

### 1.2.1 Configuration lookup order

Qtile looks in the following places for a configuration file, in order:

- The location specified by the `-c` argument.

- `$XDG_CONFIG_HOME/qtile/config.py`, if it is set
- `~/.config/qtile/config.py`
- It reads the module `libqtile.resources.default_config`, included by default with every Qtile installation.

## 1.2.2 Default Configuration

The [default configuration](#) is invoked when qtile cannot find a configuration file. In addition, if qtile is restarted via qshell, qtile will load the default configuration if the config file it finds has some kind of error in it. The documentation below describes the configuration lookup process, as well as what the key bindings are in the default config.

The default config is not intended to be suitable for all users; it's mostly just there so qtile does /something/ when fired up, and so that it doesn't crash and cause you to lose all your work if you reload a bad config.

### Key Bindings

The mod key for the default config is `mod4`, which is typically bound to the “Super” keys, which are things like the windows key and the mac command key. The basic operation is:

- `mod + k` or `mod + j`: switch windows on the current stack
- `mod + <space>`: put focus on the other pane of the stack (when in stack layout)
- `mod + <tab>`: switch layouts
- `mod + w`: close window
- `mod + <ctrl> + r`: restart qtile with new config
- `mod + <group name>`: switch to that group
- `mod + <shift> + <group name>`: send a window to that group
- `mod + <enter>`: start xterm
- `mod + r`: start a little prompt in the bar so users can run arbitrary commands

The default config defines one screen and 8 groups, one for each letter in `asdfuiop`. It has a basic bottom bar that includes a group box, the current window name, a little text reminder that you're using the default config, a system tray, and a clock.

The default configuration has several more advanced key combinations, but the above should be enough for basic usage of qtile.

### Mouse Bindings

By default, holding your `mod` key and clicking (and holding) a window will allow you to drag it around as a floating window.

## 1.2.3 Configuration variables

A Qtile configuration consists of a file with a bunch of variables in it, which qtile imports and then runs as a python file to derive its final configuration. The documentation below describes the most common configuration variables; more advanced configuration can be found in the [qtile-examples](#) repository, which includes a number of real-world configurations that demonstrate how you can tune Qtile to your liking. (Feel free to issue a pull request to add your own configuration to the mix!)

## Lazy objects

The `command.lazy` object is a special helper object to specify a command for later execution. This object acts like the root of the object graph, which means that we can specify a key binding command with the same syntax used to call the command through a script or through `qshell`.

### Example

```
from libqtile.config import Key
from libqtile.command import lazy

keys = [
    Key(
        ["mod1"], "k",
        lazy.layout.down()
    ),
    Key(
        ["mod1"], "j",
        lazy.layout.up()
    )
]
```

## Lazy functions

This is overview of the commonly used functions for the key bindings. These functions can be called from commands on the `Qtile` object or on another object in the command tree.

Some examples are given below.

### General functions

function	description
<code>lazy.spawn("application")</code>	Run the application
<code>lazy.spawnncmd()</code>	Open command prompt on the bar. See prompt widget.
<code>lazy.restart()</code>	Restart Qtile and reload its config. It won't close your windows
<code>lazy.shutdown()</code>	Close the whole Qtile

## Group functions

function	description
lazy. next_layout()	Use next layout on the actual group
lazy. prev_layout()	Use previous layout on the actual group
lazy.screen. next_group()	Move to the group on the right
lazy.screen. prev_group()	Move to the group on the left
lazy.screen. toggle_group()	Move to the last visited group
lazy. group["group_name"]. toscreen()	Move to the group called group_name
lazy.layout. increase_ratio()	Increase the space for master window at the expense of slave windows
lazy.layout. decrease_ratio()	Decrease the space for master window in the advantage of slave windows

## Window functions

function	description
lazy.window. kill()	Close the focused window
lazy.layout. next()	Switch window focus to other pane(s) of stack
lazy.window. togroup("group_name")	Move focused window to the group called group_name
lazy.window. toggle_floating()	Put the focused window to/from floating mode
lazy.window. toggle_fullscreen()	Put the focused window to/from fullscreen mode

## ScratchPad DropDown functions

function	description
lazy. dropdown_toggle("name")	Toggles the visibility of the specified DropDown window. On first use, the configured process is spawned.

## Groups

A group is a container for a bunch of windows, analogous to workspaces in other window managers. Each client window managed by the window manager belongs to exactly one group. The `groups` config file variable should be initialized to a list of `DGroup` objects.

DGroup objects provide several options for group configuration. Groups can be configured to show and hide themselves when they’re not empty, spawn applications for them when they start, automatically acquire certain groups, and various other options.

## Example

```
from libqtile.config import Group, Match
groups = [
    Group("a"),
    Group("b"),
    Group("c", matches=[Match(wm_class=["Firefox"])]),
]

# allow mod3+1 through mod3+0 to bind to groups; if you bind your groups
# by hand in your config, you don't need to do this.
from libqtile.dgroups import simple_key_binder
dgroups_key_binder = simple_key_binder("mod3")
```

## Reference

### Group

```
class libqtile.config.Group(name, matches=None, exclusive=False, spawn=None, layout=None,
                            layouts=None, persist=True, init=True, layout_opts=None,
                            screen_affinity=None, position=9223372036854775807, label=None)
```

Represents a “dynamic” group

These groups can spawn apps, only allow certain Matched windows to be on them, hide when they’re not in use, etc. Groups are identified by their name.

#### Parameters

**name** [string] the name of this group

**matches** [default None] list of Match objects whose windows will be assigned to this group

**exclusive** [boolean] when other apps are started in this group, should we allow them here or not?

**spawn** [string or list of strings] this will be exec()d when the group is created, you can pass either a program name or a list of programs to exec()

**layout** [string] the name of default layout for this group (e.g. ‘max’ or ‘stack’). This is the name specified for a particular layout in config.py or if not defined it defaults in general the class name in all lower case.

**layouts** [list] the group layouts list overriding global layouts. Use this to define a separate list of layouts for this particular group.

**persist** [boolean] should this group stay alive with no member windows?

**init** [boolean] is this group alive when qtile starts?

**position** [int] group position

**label** [string] the display name of the group. Use this to define a display name other than name of the group. If set to None, the display name is set to the name.

---

```
libqtile.dgroups.simple_key_binder(mod, keynames=None)
Bind keys to mod+group position or to the keys specified as second argument
```

## Group Matching

### Match

```
class libqtile.config.Match(title=None,      wm_class=None,      role=None,      wm_type=None,
                           wm_instance_class=None, net_wm_pid=None)
```

Match for dynamic groups

It can match by title, class or role.

Match supports both regular expression objects (i.e. the result of `re.compile()`) or strings (match as a “include” match). If a window matches any of the things in any of the lists, it is considered a match.

#### Parameters

**title:** things to match against the title (WM\_NAME)

**wm\_class:** things to match against the second string in WM\_CLASS atom

**role:** things to match against the WM\_ROLE atom

**wm\_type:** things to match against the WM\_TYPE atom

**wm\_instance\_class:** things to match against the first string in WM\_CLASS atom

**net\_wm\_pid:** things to match against the \_NET\_WM\_PID atom (only int allowed in this rule)

### Rule

```
class libqtile.config.Rule(match,      group=None,      float=False,      intrusive=False,
                           break_on_match=True)
```

How to act on a Match

A Rule contains a Match object, and a specification about what to do when that object is matched.

#### Parameters

**match :** Match object associated with this Rule

**float :** auto float this window?

**intrusive :** override the group’s exclusive setting?

**break\_on\_match :** Should we stop applying rules if this rule is matched?

## ScratchPad and DropDown

*ScratchPad* is a special - by default invisible - group which acts as a container for *DropDown* configurations. A *DropDown* can be configured to spawn a defined process and bind that process’ window to it. The associated window can then be shown and hidden by the lazy command `dropdown_toggle()` (see *Lazy objects*) from the ScratchPad group. Thus - for example - your favorite terminal emulator turns into a quake-like terminal by the control of qtile.

If the *DropDown* window turns visible it is placed as a floating window on top of the current group. If the *DropDown* is hidden, it is simply switched back to the ScratchPad group.

## Example

```
from libqtile.config import Group, ScratchPad, DropDown, Key
from libqtile.command import lazy
groups = [
    ScratchPad("scratchpad", [
        # define a drop down terminal.
        # it is placed in the upper third of screen by default.
        DropDown("term", "urxvt", opacity=0.8),

        # define another terminal exclusively for qshell at different position
        DropDown("qshell", "urxvt -hold -e qshell",
                 x=0.05, y=0.4, width=0.9, height=0.6, opacity=0.9,
                 on_focus_lost_hide=True),
    ],
    Group("a"),
]

keys = [
    # toggle visibility of above defined DropDown named "term"
    Key([], 'F11', lazy.group['scratchpad'].dropdown_toggle('term')),
    Key([], 'F12', lazy.group['scratchpad'].dropdown_toggle('qshell')),
]
```

There is only one DropDown visible in current group at a time. If a further DropDown is set visible the currently shown DropDown turns invisible immediately.

Note that if the window is set to not floating, it is detached from DropDown and ScratchPad, and a new process is spawned next time the DropDown is set visible.

## Reference

### ScratchPad

```
class libqtile.config.ScratchPad(name, dropdowns=None, position=9223372036854775807,
                                 label="")
```

Represents a “ScratchPad” group

ScratchPad adds a (by default) invisible group to qtile. That group is used as a place for currently not visible windows spawned by a DropDown configuration.

#### Parameters

**name** [string] the name of this group

**dropdowns** [default None] list of DropDown objects

**position** [int] group position

**label** [string] The display name of the ScratchPad group. Defaults to the empty string such that the group is hidden in GroupList widget.

### DropDown

```
class libqtile.config.DropDown(name, cmd, **config)
```

Configure a specified command and its associated window for the ScratchPad. That window can be shown and hidden using a configurable keystroke or any other scripted trigger.

key	default	description
height	0.35	Height of window as fraction of current screen.
on_focus_lost_hide	False	Shall the window be hidden if focus is lost? If so, the DropDown is hidden if window focus or the group is changed.
opacity	0.9	Opacity of window as fraction. Zero is opaque.
warp_pointer	True	Shall pointer warp to center of window on activation? This has only effect if any of the on_focus_lost_xxx configurations is True
width	0.8	Width of window as fraction of current screen width
x	0.1	X position of window as fraction of current screen width. 0 is the left most position.
y	0.0	Y position of window as fraction of current screen height. 0 is the top most position. To show the window at bottom, you have to configure a value < 1 and an appropriate height.

## Keys

The `keys` variable defines Qtile's key bindings. Individual key bindings are defined with `libqtile.config.Key` as demonstrated in the following example. Note that you may specify more than one callback functions.

```
from libqtile.config import Key

keys = [
    # Pressing "Meta + Shift + a".
    Key(["mod4", "shift"], "a", callback, ...),

    # Pressing "Control + p".
    Key(["control"], "p", callback, ...),

    # Pressing "Meta + Tab".
    Key(["mod4", "mod1"], "Tab", callback, ...),
]
```

The above may also be written more concisely with the help of the `libqtile.config.EzKey` helper class. The following example is functionally equivalent to the above:

```
from libqtile.config import EzKey as Key

keys = [
    Key("M-S-a", callback, ...),
    Key("C-p", callback, ...),
    Key("M-A-<Tab>", callback, ...),
]
```

The `EzKey` modifier keys (i.e. MASC) can be overwritten through the `EzKey.modifier_keys` dictionary. The defaults are:

```
modifier_keys = {
    'M': 'mod4',
    'A': 'mod1',
    'S': 'shift',
    'C': 'control',
}
```

## Modifiers

On most systems mod1 is the Alt key - you can see which modifiers, which are enclosed in a list, map to which keys on your system by running the `xmodmap` command. This example binds Alt-k to the “down” command on the current layout. This command is standard on all the included layouts, and switches to the next window (where “next” is defined differently in different layouts). The matching “up” command switches to the previous window.

Modifiers include: “shift”, “lock”, “control”, “mod1”, “mod2”, “mod3”, “mod4”, and “mod5”. They can be used in combination by appending more than one modifier to the list:

```
Key (  
    ["mod1", "control"], "k",  
    lazy.layout.shuffle_down()  
)
```

## Special keys

These are most commonly used special keys. For complete list please see [the code](#). You can create bindings on them just like for the regular keys. For example `Key (["mod1"], "F4", lazy.window.kill())`.

Return
BackSpace
Tab
space
Home, End
Left, Up, Right, Down
F1, F2, F3, ...
XF86AudioRaiseVolume
XF86AudioLowerVolume
XF86AudioMute
XF86AudioNext
XF86AudioPrev
XF86MonBrightnessUp
XF86MonBrightnessDown

## Reference

### Key

```
class libqtile.config.Key(modifiers, key, *commands, **kwds)
```

Defines a keybinding.

#### Parameters

**modifiers:** A list of modifier specifications. Modifier specifications are one of: “shift”, “lock”, “control”, “mod1”, “mod2”, “mod3”, “mod4”, “mod5”.

**key:** A key specification, e.g. “a”, “Tab”, “Return”, “space”.

**commands:** A list of lazy command objects generated with the `command.lazy` helper. If multiple Call objects are specified, they are run in sequence.

**kwds:** A dictionary containing “desc”, allowing a description to be added

## EzConfig

```
class libqtile.config.EzConfig
```

Helper class for defining key and button bindings in an emacs-like format. Inspired by Xmonad’s XMonad.Util.EZConfig.

## Layouts

A layout is an algorithm for laying out windows in a group on your screen. Since Qtile is a tiling window manager, this usually means that we try to use space as efficiently as possible, and give the user ample commands that can be bound to keys to interact with layouts.

The `layouts` variable defines the list of layouts you will use with Qtile. The first layout in the list is the default. If you define more than one layout, you will probably also want to define key bindings to let you switch to the next and previous layouts.

See [Built-in Layouts](#) for a listing of available layouts.

## Example

```
from libqtile import layout
layouts = [
    layout.Max(),
    layout.Stack(stacks=2)
]
```

## Mouse

The mouse config file variable defines a set of global mouse actions, and is a list of `Click` and `Drag` objects, which define what to do when a window is clicked or dragged.

## Example

```
from libqtile.config import Click, Drag
mouse = [
    Drag([mod], "Button1", lazy.window.set_position_floating(),
         start=lazy.window.get_position()),
    Drag([mod], "Button3", lazy.window.set_size_floating(),
         start=lazy.window.get_size()),
    Click([mod], "Button2", lazy.window.bring_to_front())
]
```

The above example can also be written more concisely with the help of the `EzClick` and `EzDrag` helpers:

```
from libqtile.config import EzClick as Click, EzDrag as Drag
mouse = [
    Drag("M-1", lazy.window.set_position_floating(),
```

(continues on next page)

(continued from previous page)

```
    start=lazy.window.get_position(),
    Drag("M-3", lazy.window.set_size_floating(),
        start=lazy.window.get_size(),
        Click("M-2", lazy.window.bring_to_front())
    ]
```

## Reference

### Click

**class** libqtile.config.Click(modifiers, button, \*commands, \*\*kwargs)  
Defines binding of a mouse click

It focuses clicked window by default. If you want to prevent it, pass *focus=None* as an argument

### Drag

**class** libqtile.config.Drag(modifiers, button, \*commands, \*\*kwargs)  
Defines binding of a mouse to some dragging action

On each motion event command is executed with two extra parameters added x and y offset from previous move

It focuses clicked window by default. If you want to prevent it pass, *focus=None* as an argument

## Screens

The screens configuration variable is where the physical screens, their associated bars, and the widgets contained within the bars are defined.

See [Built-in Widgets](#) for a listing of available widgets.

## Example

Tying together screens, bars and widgets, we get something like this:

```
from libqtile.config import Screen
from libqtile import bar, widget

screens = [
    Screen(
        bottom=bar.Bar([
            widget.GroupBox(),
            widget.WindowName()
        ], 30),
    ),
    Screen(
        bottom=bar.Bar([
            widget.GroupBox(),
            widget.WindowName()
        ], 30),
    )
]
```

Bars support both solid background colors and gradients by supplying a list of colors that make up a linear gradient. For example, `bar.Bar(..., background="#000000")` will give you a black background (the default), while `bar.Bar(..., background=["#000000", "#FFFFFF"])` will give you a background that fades from black to white.

## Third-party bars

There might be some reasons to use third-party bars. For instance you can come from another window manager and you have already configured dzen2, xmobar, or something else. They definitely can be used with Qtile too. In fact, any additional configurations aren't needed. Just run the bar and qtile will adapt.

## Reference

### Screen

```
class libqtile.config.Screen(top=None, bottom=None, left=None, right=None, x=None, y=None, width=None, height=None)
```

A physical screen, and its associated paraphernalia.

Define a screen with a given set of Bars of a specific geometry. Note that bar.Bar objects can only be placed at the top or the bottom of the screen (bar.Gap objects can be placed anywhere). Also, x, y, width, and height aren't specified usually unless you are using 'fake screens'.

#### Parameters

**top:** List of Gap/Bar objects, or None.

**bottom:** List of Gap/Bar objects, or None.

**left:** List of Gap/Bar objects, or None.

**right:** List of Gap/Bar objects, or None.

**x** [int or None]

**y** [int or None]

**width** [int or None]

**height** [int or None]

### Bar

```
class libqtile.bar.Bar(widgets, size, **config)
```

A bar, which can contain widgets

#### Parameters

**widgets :** A list of widget objects.

**size :** The "thickness" of the bar, i.e. the height of a horizontal bar, or the width of a vertical bar.

key	default	description
background	'#000000'	Background colour.
opacity	1	Bar window opacity.

## Gap

```
class libqtile.bar.Gap(size)
    A gap placed along one of the edges of the screen
```

If a gap has been defined, Qtile will avoid covering it with windows. The most probable reason for configuring a gap is to make space for a third-party bar or other static window.

### Parameters

**size :** The “thickness” of the gap, i.e. the height of a horizontal gap, or the width of a vertical gap.

## Hooks

Qtile provides a mechanism for subscribing to certain events in `libqtile.hook`. To subscribe to a hook in your configuration, simply decorate a function with the hook you wish to subscribe to.

See [Built-in Hooks](#) for a listing of available hooks.

## Examples

### Automatic floating dialogs

Let’s say we wanted to automatically float all dialog windows (this code is not actually necessary; Qtile floats all dialogs by default). We would subscribe to the `client_new` hook to tell us when a new window has opened and, if the type is “dialog”, as can set the window to float. In our configuration file it would look something like this:

```
from libqtile import hook

@hook.subscribe.client_new
def floating_dialogs(window):
    dialog = window.window.get_wm_type() == 'dialog'
    transient = window.window.get_wm_transient_for()
    if dialog or transient:
        window.floating = True
```

A list of available hooks can be found in the [Built-in Hooks](#) reference.

## Autostart

If you want to run commands or spawn some applications when Qtile starts, you’ll want to look at the `startup` and `startup_once` hooks. `startup` is emitted every time Qtile starts (including restarts), whereas `startup_once` is only emitted on the very first startup.

Let’s create a file `~/.config/qtile/autostart.sh` that will set our desktop wallpaper and start a few programs when Qtile first runs.

```
#!/bin/sh
feh --bg-scale ~/images/wallpaper.jpg &
pidgin &
dropbox start &
```

We can then subscribe to `startup_once` to run this script:

```

import os
import subprocess

@hook.subscribe.startup_once
def autostart():
    home = os.path.expanduser('~/config/qtile/autostart.sh')
    subprocess.call([home])

```

In addition to the above variables, there are several other boolean configuration variables that control specific aspects of Qtile's behavior:

variable	default	description
auto_fullscr <b>ene</b>		If a window requests to be fullscreen, it is automatically fullscreened. Set this to false if you only want windows to be fullscreen if you ask them to be.
bring_front <b>click</b>		When clicked, should the window be brought to the front or not. (This sets the X Stack Mode to Above.)
cursor_warp <b>False</b>		If true, the cursor follows the focus as directed by the keyboard, warping to the center of the focused window.
dgroups_key <b>Nmader</b>	TODO	
dgroups_app <b>l_rules</b>	TODO	
extension_defaults as wid- get_defaults		Default settings for extensions.
floating_layout.Floating <b>float_rules</b> =[...]		See the configuration file for the default <i>float_rules</i> .
focus_on_window_activate <b>Behavior</b>		Behavior of the _NET_ACTIVATE_WINDOW message sent by applications <ul style="list-style-type: none"> <li>• urgent: urgent flag is set for the window</li> <li>• focus: automatically focus the window</li> <li>• smart: automatically focus if the window is in the current group</li> </ul>
follow_mouse <b>focus</b>		Controls whether or not focus follows the mouse around as it moves across windows in a layout.
main	None	TODO
widget_defaults <b>dict(font='sans',</b> <b>fontsize=12,</b> <b>padding=3)</b>		Deflct settings for bar widgets.
wmname	"LG3D"	TODO

## 1.2.4 Testing your configuration

The best way to test changes to your configuration is with the provided Xephyr script. This will run Qtile with your config.py inside a nested X server and prevent your running instance of Qtile from crashing if something goes wrong.

See [Hacking Qtile](#) for more information on using Xephyr.

## 1.2.5 Starting Qtile

There are several ways to start Qtile. The most common way is via an entry in your X session manager's menu. The default Qtile behavior can be invoked by creating a qtile.desktop file in /usr/share/xsessions.

A second way to start Qtile is a custom X session. This way allows you to invoke Qtile with custom arguments, and also allows you to do any setup you want (e.g. special keyboard bindings like mapping caps lock to control, setting your desktop background, etc.) before Qtile starts. If you’re using an X session manager, you still may need to create a `custom.desktop` file similar to the `qtile.desktop` file above, but with `Exec=/etc/X11/xsession`. Then, create your own `~/.xsession`. There are several examples of user defined `xsession`s in the [qtile-examples](#) repository.

Finally, if you’re a gnome user, you can start integrate Qtile into Gnome’s session manager and use gnome as usual:

## Running Inside Gnome

Add the following snippet to your Qtile configuration. As per [this page](#), it registers Qtile with gnome-session. Without it, a “Something has gone wrong!” message shows up a short while after logging in. `dbus-send` must be on your \$PATH.

```
import subprocess
import os
from libqtile import hook

@hook.subscribe.startup
def dbus_register():
    id = os.environ.get('DESKTOP_AUTOSTART_ID')
    if not id:
        return
    subprocess.Popen(['dbus-send',
                     '--session',
                     '--print-reply',
                     '--dest=org.gnome.SessionManager',
                     '/org/gnome/SessionManager',
                     'org.gnome.SessionManager.RegisterClient',
                     'string:qtile',
                     'string:' + id])
```

This adds a new entry “Qtile GNOME” to GDM’s login screen.

```
$ cat /usr/share/xsessions/qtile_gnome.desktop
[Desktop Entry]
Name=Qtile GNOME
Comment=Tiling window manager
TryExec=/usr/bin/gnome-session
Exec=gnome-session --session=qtile
Type=XSession
```

The custom session for gnome-session.

```
$ cat /usr/share/gnome-session/sessions/qtile.session
[GNOME Session]
Name=Qtile session
RequiredComponents=qtile;gnome-settings-daemon;
```

So that Qtile starts automatically on login.

```
$ cat /usr/share/applications/qtile.desktop
[Desktop Entry]
Type=Application
Encoding=UTF-8
```

(continues on next page)

(continued from previous page)

```
Name=Qtile
Exec=qtile
NoDisplay=true
X-GNOME-WMName=Qtile
X-GNOME-Autostart-Phase=WindowManager
X-GNOME-Provides>windowmanager
X-GNOME-Autostart-Notify=false
```

The above does not start gnome-panel. Getting gnome-panel to work requires some extra Qtile configuration, mainly making the top and bottom panels static on panel startup and leaving a gap at the top (and bottom) for the panel window.

You might want to add keybindings to log out of the GNOME session.

```
Key([mod, 'control'], 'l', lazy.spawn('gnome-screensaver-command -l')),
Key([mod, 'control'], 'q', lazy.spawn('gnome-session-quit --logout --no-prompt')),
Key([mod, 'shift', 'control'], 'q', lazy.spawn('gnome-session-quit --power-off')),
```

The above apps need to be in your path (though they are typically installed in /usr/bin, so they probably are if they're installed at all).



# CHAPTER 2

---

## Commands and scripting

---

### 2.1 Commands API


Qtile's command API is based on a graph of objects, where each object has a set of associated commands. The graph and object commands are used in a number of different places:

- Commands can be *bound to keys* in the Qtile configuration file.
- Commands can be *called through qshell*, the Qtile shell.
- The qsh can also be hooked into a Jupyter kernel *called iqshell*.
- Commands can be *called from a script* to interact with Qtile from Python.

If the explanation below seems a bit complex, please take a moment to explore the API using the `qshell` command shell. Command lists and detailed documentation can be accessed from its built-in help command.

#### 2.1.1 Object Graph

The objects in Qtile's object graph come in seven flavours, matching the seven basic components of the window manager: layouts, windows, groups, bars, widgets, screens, and a special root node. Objects are addressed by a path specification that starts at the root, and follows the edges of the graph. This is what the graph looks like:

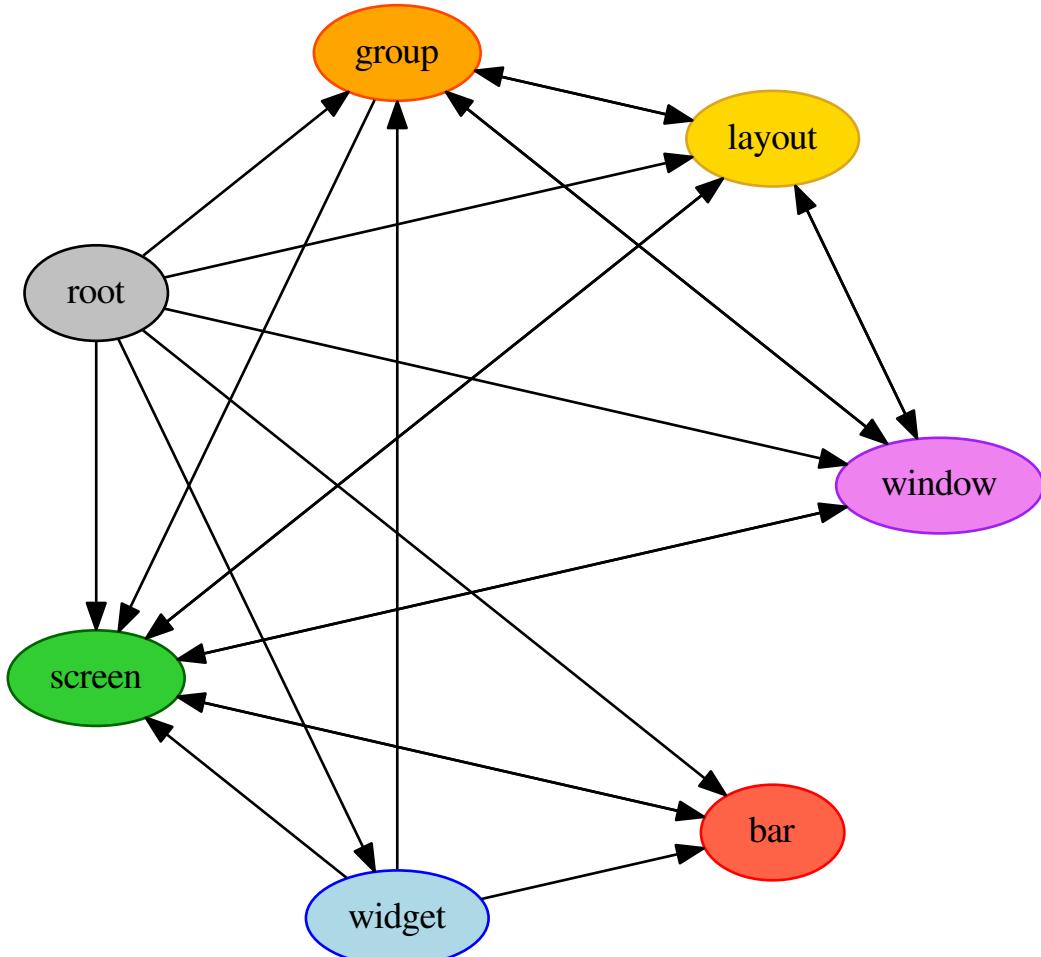

Each arrow can be read as “holds a reference to”. So, we can see that a `widget` object *holds a reference to* objects of type `bar`, `screen` and `group`. Lets start with some simple examples of how the addressing works. Which particular objects we hold reference to depends on the context - for instance, widgets hold a reference to the screen that they appear on, and the bar they are attached to.

Lets look at an example, starting at the root node. The following script runs the `status` command on the root node, which, in this case, is represented by the `Client` object:

```
from libqtile.command import Client
c = Client()
print c.status()
```

From the graph, we can see that the root node holds a reference to `group` nodes. We can access the “info” command on the current group like so:

```
c.group.info()
```

To access a specific group, regardless of whether or not it is current, we use the Python containment syntax. This

command sends group “b” to screen 1 (by the `libqtile.config.Group.to_screen()` method):

```
c.group["b"].to_screen(1)
```

The current group, layout, screen and window can be accessed by simply leaving the key specifier out. The key specifier is mandatory for `widget` and `bar` nodes.

We can now drill down deeper in the graph. To access the screen currently displaying group “b”, we can do this:

```
c.group["b"].screen.info()
```

Be aware, however, that group “b” might not currently be displayed. In that case, it has no associated screen, the path resolves to a non-existent node, and we get an exception:

```
libqtile.command.CommandError: No object screen in path 'group['b'].screen'
```

The graph is not a tree, since it can contain cycles. This path (redundantly) specifies the group belonging to the screen that belongs to group “b”:

```
c.group["b"].screen.group
```

## 2.1.2 Keys

The key specifier for the various object types are as follows:

Object	Key	Optional?	Example
bar	“top”, “bottom”	No	<code>c.screen.bar[“bottom”]</code>
group	Name string	Yes	<code>c.group[“one”]</code> <code>c.group</code>
layout	Integer index	Yes	<code>c.layout[2]</code> <code>c.layout</code>
screen	Integer index	Yes	<code>c.screen[1]</code> <code>c.screen</code>
widget	Widget name	No	<code>c.widget[“textbox”]</code>
window	Integer window ID	Yes	<code>c.window[123456]</code> <code>c.window</code>

## 2.2 Scripting

### 2.2.1 Client-Server Scripting Model

Qtile has a client-server control model - the main Qtile instance listens on a named pipe, over which marshalled command calls and response data is passed. This allows Qtile to be controlled fully from external scripts. Remote interaction occurs through an instance of the `libqtile.command.Client` class. This class establishes a connection to the currently running instance of Qtile, and sources the user's configuration file to figure out which commands should be exposed. Commands then appear as methods with the appropriate signature on the `Client` object. The object hierarchy is described in the [Commands API](#) section of this manual. Full command documentation is available through the [Qtile Shell](#).

### 2.2.2 Example

Below is a very minimal example script that inspects the current qtile instance, and returns the integer offset of the current screen.

```
from libqtile.command import Client
c = Client()
print c.screen.info()["index"]
```

### 2.2.3 Reference

#### Client

```
class libqtile.command.Client(fname=None, is_json=False)
    Exposes a command tree used to communicate with a running instance of Qtile
```

## 2.3 qshell

The Qtile command shell is a command-line shell interface that provides access to the full complement of Qtile command functions. The shell features command name completion, and full command documentation can be accessed from the shell itself. The shell uses GNU Readline when it's available, so the interface can be configured to, for example, obey VI keybindings with an appropriate `.inputrc` file. See the GNU Readline documentation for more information.

### 2.3.1 Navigating the Object Graph

The shell presents a filesystem-like interface to the object graph - the builtin “cd” and “ls” commands act like their familiar shell counterparts:

```
> ls
layout/  widget/  screen/  bar/      window/  group/
> cd bar
bar> ls
bottom/
```

(continues on next page)

(continued from previous page)

```
bar> cd bottom

bar['bottom']> ls
screen/

bar['bottom']> cd ../../

> ls
layout/ widget/ screen/ bar/ window/ group/
```

Note that the shell provides a “short-hand” for specifying node keys (as opposed to children). The following is a valid shell path:

```
> cd group/4/window/31457314
```

The command prompt will, however, always display the Python node path that should be used in scripts and key bindings:

```
group['4'].window[31457314]>
```

## 2.3.2 Live Documentation

The shell `help` command provides the canonical documentation for the Qtile API:

```
> cd layout/1

layout[1]> help
help command -- Help for a specific command.

Builtins
=====
cd exit help ls q quit

Commands for this object
=====
add commands current delete doc
down get info items next previous
rotate shuffle_down shuffle_up toggle_split up

layout[1]> help previous
previous()
Focus previous stack.
```

## 2.3.3 Reference

### Qsh

```
class libqtile.sh.QSh(client, completekey='tab')
Qtile shell instance

do_cd(arg)
    Change to another path.
```

## Examples

```
cd layout/0
cd ../layout
do_exit (args)
    Exit qshell
do_ls (arg)
    List contained items on a node.
```

## Examples

```
> ls > ls ../layout
do_pwd (arg)
    Returns the current working location
This is the same information as presented in the qshell prompt, but is very useful when running iqshell.
```

## Examples

```
> pwd / > cd bar/top bar['top']> pwd bar['top']
do_help (arg)
    Give help on commands and builtins
When invoked without arguments, provides an overview of all commands. When passed as an argument, also provides a detailed help on a specific command or builtin.
```

## Examples

```
> help
> help command
```

## 2.4 iqshell

In addition to the standard `qshell` shell interface, we provide a kernel capable of running through Jupyter that hooks into the `qshell` client. The command structure and syntax is the same as `qshell`, so it is recommended you read that for more information about that.

### 2.4.1 Dependencies

In order to run `iqshell`, you must have `ipykernel` and `jupyter_console`. You can install the dependencies when you are installing `qtile` by running:

```
$ pip install qtile[ipython]
```

Otherwise, you can just install these two packages separately, either through PyPI or through your distribution package manager.

## 2.4.2 Installing and Running the Kernel

Once you have the required dependencies, you can run the kernel right away by running:

```
$ python -m libqtile.interactive.iqshell_kernel
```

However, this will merely spawn a kernel instance, you will have to run a separate frontend that connects to this kernel.

A more convenient way to run the kernel is by registering the kernel with Jupyter. To register the kernel itself, run:

```
$ python -m libqtile.interactive.iqshell_install
```

If you run this as a non-root user, or pass the `--user` flag, this will install to the user Jupyter kernel directory. You can now invoke the kernel directly when starting a Jupyter frontend, for example:

```
$ jupyter console --kernel qshell
```

The `iqshell` script will launch a Jupyter terminal console with the `qshell` kernel.

## 2.4.3 iqshell vs qshell

One of the main drawbacks of running through a Jupyter kernel is the frontend has no way to query the current node of the kernel, and as such, there is no way to set a custom prompt. In order to query your current node, you can call `pwd`.

This, however, enables many of the benefits of running in a Jupyter frontend, including being able to save, run, and re-run code cells in frontends such as the Jupyter notebook.

The Jupyter kernel also enables more advanced help, text completion, and introspection capabilities (however, these are currently not implemented at a level much beyond what is available in the standard `qshell`).

## 2.5 qtile-top

Is a top like to measure memory usage of qtile's internals.

## 2.6 qtile-run

Run a command applying rules to the new windows, ie, you can start a window in a specific group, make it floating, intrusive, etc.

The Windows must have `NET_WM_PID`.

```
# run xterm floating on group "test-group"
qtile-run -g test-group -f xterm
```

## 2.7 qtile-cmd

This is a simple tool to expose `qtile.command` functionality to shell. This can be used standalone or in other shell scripts.

## 2.7.1 Examples:

### Output of qtile-cmd -h

```
usage: qtile-cmd [-h] [--object OBJ_SPEC [OBJ_SPEC ...]]
                  [--function FUNCTION] [--args ARGS [ARGS ...]] [--info]

Simple tool to expose qtile.command functionality to shell.

optional arguments:
  -h, --help            show this help message and exit
  --object OBJ_SPEC [OBJ_SPEC ...], -o OBJ_SPEC [OBJ_SPEC ...]
                        Specify path to object (space separated). If no
                        --function flag display available commands.
  --function FUNCTION
                        Select function to execute.
  --args ARGS [ARGS ...], -a ARGS [ARGS ...]
                        Set arguments supplied to function.
  --info, -i            With both --object and --function args prints
                        documentation for function.

Examples:
  qtile-cmd
  qtile-cmd -o cmd
  qtile-cmd -o cmd -f prev_layout -i
  qtile-cmd -o cmd -f prev_layout -a 3 # prev_layout on group 3
  qtile-cmd -o group 3 -f focus_back
```

### Output of qtile-cmd -o group 3

-o group 3 -f commands	Returns a list of possible commands for this object
-o group 3 -f doc	* Returns the documentation for a specified command
↳ name	
-o group 3 -f eval	* Evaluates code in the same context as this function
-o group 3 -f focus_back	Focus the window that had focus before the current
↳ one got it.	
-o group 3 -f focus_by_name	* Focus the first window with the given name. Do
↳ nothing if the name is	
-o group 3 -f function	* Call a function with current object as argument
-o group 3 -f info	Returns a dictionary of info for this group
-o group 3 -f info_by_name	* Get the info for the first window with the given
↳ name without giving it	
-o group 3 -f items	* Returns a list of contained items for the specified
↳ name	
-o group 3 -f next_window	Focus the next window in group.
-o group 3 -f prev_window	Focus the previous window in group.
-o group 3 -f set_label	* Set the display name of current group to be used in
↳ GroupBox widget.	
-o group 3 -f setlayout	
-o group 3 -f switch_groups	* Switch position of current group with name
-o group 3 -f toscreen	* Pull a group to a specified screen.
-o group 3 -f unminimize_all	Unminimise all windows in this group

## Output of `qtile-cmd -o cmd`

```

-o cmd -f add_rule           * Add a dgroup rule, returns rule_id needed to remove_it
-o cmd -f addgroup          * Add a group with the given name
-o cmd -f commands          Returns a list of possible commands for this object
-o cmd -f critical           Set log level to CRITICAL
-o cmd -f debug              Set log level to DEBUG
-o cmd -f delgroup          * Delete a group with the given name
-o cmd -f display_kb         * Display table of key bindings
-o cmd -f doc                * Returns the documentation for a specified command_name
-o cmd -f error              Set log level to ERROR
-o cmd -f eval               * Evaluates code in the same context as this function
-o cmd -f findwindow         * Launch prompt widget to find a window of the given_name
-o cmd -f focus_by_click     * Bring a window to the front
-o cmd -f function            Call a function with current object as argument
-o cmd -f get_info            Prints info for all groups
-o cmd -f get_state           Get pickled state for restarting qtile
-o cmd -f get_test_data      Returns any content arbitrarily set in the self._test_data attribute.
-o cmd -f groups              Return a dictionary containing information for all_groups
-o cmd -f hide_show_bar       * Toggle visibility of a given bar
-o cmd -f info                Set log level to INFO
-o cmd -f internal_windows   Return info for each internal window (bars, for_example)
-o cmd -f items               * Returns a list of contained items for the specified_name
-o cmd -f list_widgets        List of all addressable widget names
-o cmd -f next_layout         * Switch to the next layout.
-o cmd -f next_screen         Move to next screen
-o cmd -f next_urgent          Focus next window with urgent hint
-o cmd -f pause               Drops into pdb
-o cmd -f prev_layout         * Switch to the previous layout.
-o cmd -f prev_screen         Move to the previous screen
-o cmd -f qtile_info           Returns a dictionary of info on the Qtile instance
-o cmd -f qtilecmd             * Execute a Qtile command using the client syntax
-o cmd -f remove_rule          Remove a dgroup rule by rule_id
-o cmd -f restart              Restart qtile
-o cmd -f run_extension        Run extensions
-o cmd -f run_extention        Deprecated alias for cmd_run_extension()
-o cmd -f run_external          Run external Python script
-o cmd -f screens              Return a list of dictionaries providing information_on all_screens
-o cmd -f shutdown             Quit Qtile
-o cmd -f simulate_keypress    * Simulates a keypress on the focused window.
-o cmd -f spawn                * Run cmd in a shell.
-o cmd -f spawnncmd            * Spawn a command using a prompt widget, with tab-completion.
-o cmd -f status               Return "OK" if Qtile is running
-o cmd -f switch_groups         * Switch position of groupa to groupb
-o cmd -f switchgroup           * Launch prompt widget to switch to a given group to_the current screen
-o cmd -f sync                  Sync the X display. Should only be used for_development

```

(continues on next page)

(continued from previous page)

-o cmd -f to_layout_index	* Switch to the layout <b>with</b> the given index <b>in</b> <b>self</b> .
↳ layouts.	
-o cmd -f to_screen	* Warp focus to screen n, where n <b>is</b> a 0-based screen ↳ number
-o cmd -f togroup	* Launch prompt widget to move current window to a ↳ given group
-o cmd -f tracemalloc_dump	Dump tracemalloc snapshot
-o cmd -f tracemalloc_toggle	Toggle tracemalloc status
-o cmd -f warning	Set log level to WARNING
-o cmd -f windows	Return info <b>for</b> each client window

## 2.8 dqtile-cmd

A Rofi/dmenu interface to qtile-cmd. Accepts all arguments of qtile-cmd.

### 2.8.1 Examples:

#### Output of dqtile-cmd -o cmd

dmenu:	
Alt-1	Prompt for args and show function help (if -f is present)
..	Go back to menu.
C-u	Clear input
Esc	Exit
-o cmd -f add_rule	* Add a dgroup rule, returns rule_id needed to remove it
-o cmd -f addgroup	* Add a group with the given name
-o cmd -f commands	Returns a list of possible commands for this object
-o cmd -f critical	Set log level to CRITICAL
-o cmd -f debug	Set log level to DEBUG
-o cmd -f delgroup	* Delete a group with the given name
-o cmd -f display_kb	* Display table of key bindings
-o cmd -f doc	* Returns the documentation for a specified command name
-o cmd -f error	Set log level to ERROR
-o cmd -f eval	* Evaluates code in the same context as this function
-o cmd -f findwindow	* Launch prompt widget to find a window of the given name
-o cmd -f focus_by_click	* Bring a window to the front
-o cmd -f function	* Call a function with current object as argument
-o cmd -f get_info	Prints info for all groups
-o cmd -f get_state	Get pickled state for restarting qtile

#### Output of dqtile-cmd -h

```
dqtile-cmd

A Rofi/dmenu interface to qtile-cmd. Excepts all arguments of qtile-cmd
(see below).

usage: dqtile-cmd [-h] [--object OBJ_SPEC [OBJ_SPEC ...]]
                  [--function FUNCTION] [--args ARGS [ARGS ...]] [--info]
```

(continues on next page)

(continued from previous page)

Simple tool to expose qtile.command functionality to shell.

optional arguments:

```
-h, --help                  show this help message and exit
--object OBJ_SPEC [OBJ_SPEC ...], -o OBJ_SPEC [OBJ_SPEC ...]
                           Specify path to object (space separated). If no
                           --function flag display available commands.
--function FUNCTION, -f FUNCTION
                           Select function to execute.
--args ARGS [ARGS ...], -a ARGS [ARGS ...]
                           Set arguments supplied to function.
--info, -i                  With both --object and --function args prints
                           documentation for function.
```

Examples:

```
dqtile-cmd
dqtile-cmd -o cmd
dqtile-cmd -o cmd -f prev_layout -i
dqtile-cmd -o cmd -f prev_layout -a 3 # prev_layout on group 3
dqtile-cmd -o group 3 -f focus_back
```

If both rofi **and** dmenu are present rofi will be selected **as** default, to change this  
→us --force-dmenu **as** the first argument.



# CHAPTER 3

---

## Getting involved

---

### 3.1 Contributing

#### 3.1.1 Reporting bugs

Perhaps the easiest way to contribute to Qtile is to report any bugs you run into on the [github issue tracker](#).

Useful bug reports are ones that get bugs fixed. A useful bug report normally has two qualities:

1. **Reproducible.** If your bug is not reproducible it will never get fixed. You should clearly mention the steps to reproduce the bug. Do not assume or skip any reproducing step. Described the issue, step-by-step, so that it is easy to reproduce and fix.
2. **Specific.** Do not write a essay about the problem. Be Specific and to the point. Try to summarize the problem in minimum words yet in effective way. Do not combine multiple problems even they seem to be similar. Write different reports for each problem.


#### 3.1.2 Writing code

To get started writing code for Qtile, check out our guide to [Hacking on Qtile](#).

#### Git workflow

Our workflow is based on Vincent Driessen's successful git branching model:

- The `master` branch is our current release
- The `develop` branch is what all pull requests should be based against
- Feature branches are where new features, both major and minor, should be developed.

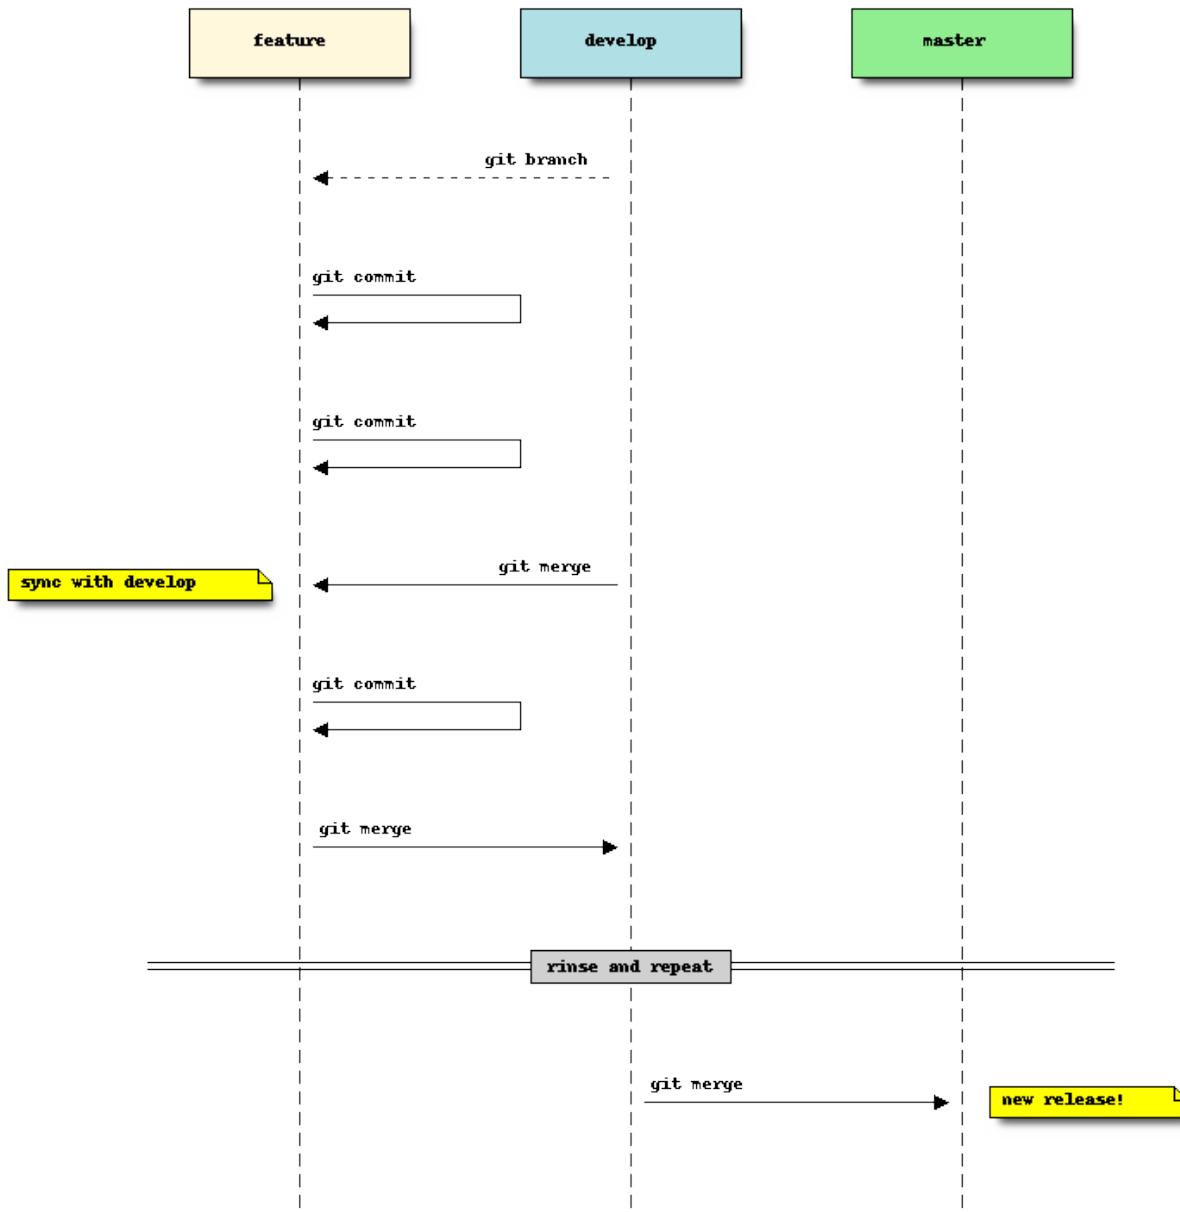

[git-flow](#) is a git plugin that helps facilitate this branching strategy. It's not required, but can help make things a bit easier to manage. There is also a good write up on [using git-flow](#).

We also request that git commit messages follow the [standard format](#).

### Submit a pull request

You've done your hacking and are ready to submit your patch to Qtile. Great! Now it's time to submit a [pull request](#) to our [issue tracker](#) on Github.

---

**Important:** Pull requests are not considered complete until they include all of the following:

- Code that conforms to PEP8.

- **Unit tests** that pass locally and in our CI environment.
  - **Documentation** updates on an as needed basis.
- 

Feel free to add your contribution (no matter how small) to the appropriate place in the CHANGELOG as well!

## 3.2 Hacking on Qtile

### 3.2.1 Requirements

Any reasonably recent version of these should work, so you can probably just install them from your package manager.

- `pytest`
- `Xephyr`
- `xvfbwrapper`
- `xrandr`, `xcalc`, `xeyes` and `xclock` (`x11-apps` on Ubuntu)

On Ubuntu, if testing on Python 3, this can be done with:

```
sudo apt-get install python3-pytest xserver-xephyr python3-xvfbwrapper x11-apps
```

Or, on Python 2:

```
sudo apt-get install python-pytest xserver-xephyr python-xvfbwrapper x11-apps
```

### 3.2.2 Building ffi module

Qtile ships with a small in-tree pangocairo binding built using `ffi`, `pangocffi.py`, and also binds to `xcursor` with `ffi`. The bindings are not built at run time and will have to be generated manually when the code is downloaded or when any changes are made to the `ffi` library. This can be done by calling:

```
python libqtile/ffi_build.py
```

### 3.2.3 Using Xephyr and the test suite

Qtile has a very extensive test suite, using the Xephyr nested X server. When tests are run, a nested X server with a nested instance of Qtile is fired up, and then tests interact with the Qtile instance through the client API. The fact that we can do this is a great demonstration of just how completely scriptable Qtile is. In fact, Qtile is designed expressly to be scriptable enough to allow unit testing in a nested environment.

The Qtile repo includes a tiny helper script to let you quickly pull up a nested instance of Qtile in Xephyr, using your current configuration. Run it from the top-level of the repository, like this:

```
./scripts/xephyr
```

In practice, the development cycle looks something like this:

1. make minor code change
2. run appropriate test: `pytest tests/test_module.py`
3. GOTO 1, until hackage is complete

4. run entire test suite: `pytest`
5. commit

### 3.2.4 Second X Session

Some users prefer to test Qtile in a second, completely separate X session: Just switch to a new tty and run `startx` normally to use the `~/.xinitrc` X startup script.

It's likely though that you want to use a different, customized startup script for testing purposes, for example `~/.config/qtile/xinitrc`. You can do so by launching X with:

```
startx ~/.config/qtile/xinitrc
```

`startx` deals with multiple X sessions automatically. If you want to use `xinit` instead, you need to first copy `/etc/X11/xinit/xserverrc` to `~/.xserverrc`; when launching it, you have to specify a new session number:

```
xinit ~/.config/qtile/xinitrc -- :1
```

Examples of custom X startup scripts are available in [qtile-examples](#).

### 3.2.5 Capturing an `xtrace`

Occasionally, a bug will be low level enough to require an `xtrace` of Qtile's conversations with the X server. To capture one of these, create an `xinitrc` or similar file with:

```
exec xtrace qtile >> ~/qtile.log
```

This will put the `xtrace` output in Qtile's logfile as well. You can then demonstrate the bug, and paste the contents of this file into the bug report.

### 3.2.6 Coding style

While not all of our code follows [PEP8](#), we do try to adhere to it where possible. All new code should be PEP8 compliant.

The `make lint` command will run a linter with our configuration over `libqtile` to ensure your patch complies with reasonable formatting constraints. We also request that git commit messages follow the [standard format](#).

### 3.2.7 Deprecation policy

When a widget API is changed, you should deprecate the change using `libqtile.widget.base.deprecated` to warn users, in addition to adding it to the appropriate place in the changelog. We will typically remove deprecated APIs one tag after they are deprecated.

### 3.2.8 Testing

Of course, your patches should also pass the unit tests as well (i.e. `make check`). These will be run by `travis-ci` on every pull request so you can see whether or not your contribution passes.

### 3.2.9 Resources

Here are a number of resources that may come in handy:

- [Inter-Client Conventions Manual](#)
- [Extended Window Manager Hints](#)
- [A reasonable basic Xlib Manual](#)



# CHAPTER 4

---

## Miscellaneous

---

### 4.1 Reference

#### 4.1.1 Scripting Commands

Here is documented some of the commands available on objects in the command tree when running qshell or scripting commands to qtile. Note that this is an incomplete list, some objects, such as [layouts](#) and [widgets](#), may implement their own set of commands beyond those given here.

##### Qtile

```
class libqtile.manager.Qtile(config, displayName=None, fname=None, no_spawn=False,  
                           state=None)
```

This object is the *root* of the command graph

```
cmd_add_rule (match_args, rule_args, min_priority=False)
```

Add a dgroup rule, returns rule\_id needed to remove it

##### Parameters

**match\_args** : config.Match arguments

**rule\_args** : config.Rule arguments

**min\_priority** : If the rule is added with minimum priority (last) (default: False)

```
cmd_addgroup (group, label=None)
```

Add a group with the given name

```
cmd_commands ()
```

Returns a list of possible commands for this object

Used by \_\_qsh\_\_ for command completion and online help

```
cmd_critical ()
```

Set log level to CRITICAL

**cmd\_debug()**  
Set log level to DEBUG

**cmd\_delgroup(*group*)**  
Delete a group with the given name

**cmd\_display\_kb(\*args)**  
Display table of key bindings

**cmd\_doc(*name*)**  
Returns the documentation for a specified command name  
Used by `__qsh__` to provide online help.

**cmd\_error()**  
Set log level to ERROR

**cmd\_eval(*code*)**  
Evaluates code in the same context as this function  
Return value is tuple (*success, result*), success being a boolean and result being a string representing the return value of eval, or None if exec was used instead.

**cmd\_findwindow(*prompt='window'*, *widget='prompt'*)**  
Launch prompt widget to find a window of the given name

#### Parameters

**prompt :** Text with which to prompt user (default: “window”)

**widget :** Name of the prompt widget (default: “prompt”)

**cmd\_focus\_by\_click(*e*)**  
Bring a window to the front

#### Parameters

**e** [xcb event] Click event used to determine window to focus

**cmd\_function(*function*, \*args, \*\*kwargs)**  
Call a function with current object as argument

**cmd\_get\_info()**  
Prints info for all groups

**cmd\_get\_state()**  
Get pickled state for restarting qtile

**cmd\_get\_test\_data()**  
Returns any content arbitrarily set in the self.test\_data attribute. Useful in tests.

**cmd\_groups()**  
Return a dictionary containing information for all groups

## Examples

```
groups()  
cmd_hide_show_bar(position='all')  
Toggle visibility of a given bar
```

#### Parameters

**position :** one of: “top”, “bottom”, “left”, “right”, or “all” (default: “all”)

---

**cmd\_info()**  
Set log level to INFO

**cmd\_internal\_windows()**  
Return info for each internal window (bars, for example)

**cmd\_items(*name*)**  
Returns a list of contained items for the specified name  
Used by \_\_qsh\_\_ to allow navigation of the object graph.

**cmd\_list\_widgets()**  
List of all addressable widget names

**cmd\_next\_layout(*group=None*)**  
Switch to the next layout.

**Parameters**

**group :** Group name. If not specified, the current group is assumed

**cmd\_next\_screen()**  
Move to next screen

**cmd\_next\_urgent()**  
Focus next window with urgent hint

**cmd\_pause()**  
Drops into pdb

**cmd\_prev\_layout(*group=None*)**  
Switch to the previous layout.

**Parameters**

**group :** Group name. If not specified, the current group is assumed

**cmd\_prev\_screen()**  
Move to the previous screen

**cmd\_qtile\_info()**  
Returns a dictionary of info on the Qtile instance

**cmd\_qtilecmd(*prompt='command'*, *widget='prompt'*, *messenger='xmessage'*)**  
Execute a Qtile command using the client syntax  
Tab completion aids navigation of the command tree

**Parameters**

**prompt :** Text to display at the prompt (default: “command: “)

**widget :** Name of the prompt widget (default: “prompt”)

**messenger :** Command to display output, set this to None to disable (default: “xmessage”)

**cmd\_remove\_rule(*rule\_id*)**  
Remove a dgroup rule by rule\_id

**cmd\_restart()**  
Restart qtile

**cmd\_run\_extension(*extension*)**  
Run extensions

```
cmd_run_extension(cls)
    Deprecated alias for cmd_run_extension()

    Note that it was accepting an extension class, not an instance.

cmd_run_external(full_path)
    Run external Python script

cmd_screens()
    Return a list of dictionaries providing information on all screens

cmd_shutdown()
    Quit Qtile

cmd_simulate_keypress(modifiers, key)
    Simulates a keypress on the focused window.
```

#### Parameters

**modifiers** : A list of modifier specification strings. Modifiers can be one of “shift”, “lock”, “control” and “mod1” - “mod5”.  
**key** : Key specification.

### Examples

```
simulate_keypress(["control", "mod2"], "k")
cmd_spawn(cmd)
    Run cmd in a shell.

    cmd may be a string, which is parsed by shlex.split, or a list (similar to subprocess.Popen).
```

### Examples

```
spawn("firefox")
spawn(["xterm", "-T", "Temporary terminal"])
cmd_spawncmd(prompt='spawn', widget='prompt', command='%s', complete='cmd')
    Spawn a command using a prompt widget, with tab-completion.
```

#### Parameters

**prompt** : Text with which to prompt user (default: “spawn: ”).  
**widget** : Name of the prompt widget (default: “prompt”).  
**command** : command template (default: “%s”).  
**complete** : Tab completion function (default: “cmd”)

```
cmd_status()
    Return “OK” if Qtile is running

cmd_switch_groups(groupa, groupb)
    Switch position of groupa to groupb

cmd_switchgroup(prompt='group', widget='prompt')
    Launch prompt widget to switch to a given group to the current screen
```

#### Parameters

**prompt :** Text with which to prompt user (default: “group”)

**widget :** Name of the prompt widget (default: “prompt”)

#### `cmd_sync()`

Sync the X display. Should only be used for development

#### `cmd_to_layout_index(index, group=None)`

Switch to the layout with the given index in self.layouts.

#### Parameters

**index :** Index of the layout in the list of layouts.

**group :** Group name. If not specified, the current group is assumed.

#### `cmd_to_screen(n)`

Warp focus to screen n, where n is a 0-based screen number

## Examples

`to_screen(0)`

#### `cmd_togroup(prompt='group', widget='prompt')`

Launch prompt widget to move current window to a given group

#### Parameters

**prompt :** Text with which to prompt user (default: “group”)

**widget :** Name of the prompt widget (default: “prompt”)

#### `cmd_tracemalloc_dump()`

Dump tracemalloc snapshot

#### `cmd_tracemalloc_toggle()`

Toggle tracemalloc status

Running tracemalloc is required for qtile-top

#### `cmd_warning()`

Set log level to WARNING

#### `cmd_windows()`

Return info for each client window

## Bar

### `class libqtile.bar.Bar(widgets, size, **config)`

A bar, which can contain widgets

#### Parameters

**widgets :** A list of widget objects.

**size :** The “thickness” of the bar, i.e. the height of a horizontal bar, or the width of a vertical bar.

key	default	description
background	'#000000'	Background colour.
opacity	1	Bar window opacity.

**cmd\_commands()**  
Returns a list of possible commands for this object  
Used by \_\_qsh\_\_ for command completion and online help

**cmd\_doc(name)**  
Returns the documentation for a specified command name  
Used by \_\_qsh\_\_ to provide online help.

**cmd\_eval(code)**  
Evaluates code in the same context as this function  
Return value is tuple (*success, result*), success being a boolean and result being a string representing the return value of eval, or None if exec was used instead.

**cmd\_fake\_button\_press(screen, position, x, y, button=1)**  
Fake a mouse-button-press on the bar. Co-ordinates are relative to the top-left corner of the bar.  
:screen The integer screen offset :position One of “top”, “bottom”, “left”, or “right”

**cmd\_function(function, \*args, \*\*kwargs)**  
Call a function with current object as argument

**cmd\_info()**  
Info for this object.

**cmd\_items(name)**  
Returns a list of contained items for the specified name  
Used by \_\_qsh\_\_ to allow navigation of the object graph.

## Group

**class libqtile.config.Group(name, matches=None, exclusive=False, spawn=None, layout=None, layouts=None, persist=True, init=True, layout\_opts=None, screen\_affinity=None, position=9223372036854775807, label=None)**

Represents a “dynamic” group

These groups can spawn apps, only allow certain Matched windows to be on them, hide when they’re not in use, etc. Groups are identified by their name.

### Parameters

**name** [string] the name of this group

**matches** [default None] list of Match objects whose windows will be assigned to this group

**exclusive** [boolean] when other apps are started in this group, should we allow them here or not?

**spawn** [string or list of strings] this will be exec()d when the group is created, you can pass either a program name or a list of programs to exec()

**layout** [string] the name of default layout for this group (e.g. ‘max’ or ‘stack’). This is the name specified for a particular layout in config.py or if not defined it defaults in general the class name in all lower case.

**layouts** [list] the group layouts list overriding global layouts. Use this to define a separate list of layouts for this particular group.

**persist** [boolean] should this group stay alive with no member windows?

**init** [boolean] is this group alive when qtile starts?

**position** [int] group position

**label** [string] the display name of the group. Use this to define a display name other than name of the group. If set to None, the display name is set to the name.

## Screen

```
class libqtile.config.Screen(top=None, bottom=None, left=None, right=None, x=None, y=None, width=None, height=None)
```

A physical screen, and its associated paraphernalia.

Define a screen with a given set of Bars of a specific geometry. Note that bar.Bar objects can only be placed at the top or the bottom of the screen (bar.Gap objects can be placed anywhere). Also, x, y, width, and height aren't specified usually unless you are using 'fake screens'.

### Parameters

**top:** List of Gap/Bar objects, or None.

**bottom:** List of Gap/Bar objects, or None.

**left:** List of Gap/Bar objects, or None.

**right:** List of Gap/Bar objects, or None.

**x** [int or None]

**y** [int or None]

**width** [int or None]

**height** [int or None]

#### **cmd\_commands ()**

Returns a list of possible commands for this object

Used by \_\_qsh\_\_ for command completion and online help

#### **cmd\_doc (*name*)**

Returns the documentation for a specified command name

Used by \_\_qsh\_\_ to provide online help.

#### **cmd\_eval (*code*)**

Evaluates code in the same context as this function

Return value is tuple (*success, result*), success being a boolean and result being a string representing the return value of eval, or None if exec was used instead.

#### **cmd\_function (*function, \*args, \*\*kwargs*)**

Call a function with current object as argument

#### **cmd\_info ()**

Returns a dictionary of info for this screen.

#### **cmd\_items (*name*)**

Returns a list of contained items for the specified name

Used by \_\_qsh\_\_ to allow navigation of the object graph.

#### **cmd\_next\_group (*skip\_empty=False, skip\_managed=False*)**

Switch to the next group

```
cmd_prev_group (skip_empty=False, skip_managed=False)
    Switch to the previous group

cmd_resize (x=None, y=None, w=None, h=None)
    Resize the screen

cmd_toggle_group (group_name=None)
    Switch to the selected group or to the previously active one

cmd_togglegroup (groupName=None)
    Switch to the selected group or to the previously active one

    Deprecated: use toggle_group()
```

## Window

```
class libqtile.window.Window (window, qtile)

    cmd_bring_to_front ()
    cmd_commands ()
        Returns a list of possible commands for this object
        Used by __qsh__ for command completion and online help

    cmd_disable_floating ()
    cmd_disable_fullscreen ()
    cmd_disable_maximize ()
    cmd_disable_minimize ()

    cmd_doc (name)
        Returns the documentation for a specified command name
        Used by __qsh__ to provide online help.

    cmd_down_opacity ()
    cmd_enable_floating ()
    cmd_enable_fullscreen ()
    cmd_enable_maximize ()
    cmd_enable_minimize ()

    cmd_eval (code)
        Evaluates code in the same context as this function
        Return value is tuple (success, result), success being a boolean and result being a string representing the return value of eval, or None if exec was used instead.

    cmd_focus (warp=None)
        Focuses the window.

    cmd_function (function, *args, **kwargs)
        Call a function with current object as argument

    cmd_get_position ()
    cmd_get_size ()
```

---

**cmd\_info()**  
Returns a dictionary of info for this object

**cmd\_inspect()**  
Tells you more than you ever wanted to know about a window

**cmd\_items(*name*)**  
Returns a list of contained items for the specified name  
Used by \_\_qsh\_\_ to allow navigation of the object graph.

**cmd\_kill()**  
Kill this window  
Try to do this politely if the client support this, otherwise be brutal.

**cmd\_match(\*args, \*\*kwargs)**

**cmd\_move\_floating(dx, dy, curx, cury)**  
Move window by dx and dy

**cmd\_opacity(*opacity*)**

**cmd\_resize\_floating(dw, dh, curx, cury)**  
Add dw and dh to size of window

**cmd\_set\_position(dx, dy, curx, cury)**

**cmd\_set\_position\_floating(x, y, curx, cury)**  
Move window to x and y

**cmd\_set\_size\_floating(w, h, curx, cury)**  
Set window dimensions to w and h

**cmd\_static(screen, x, y, width, height)**

**cmd\_toggle\_floating()**

**cmd\_toggle\_fullscreen()**

**cmd\_toggle\_maximize()**

**cmd\_toggle\_minimize()**

**cmd\_togroup(*groupName=None*)**  
Move window to a specified group.  
If groupName is not specified, we assume the current group

## Examples

Move window to current group:

```
togroup()
```

Move window to group “a”:

```
togroup("a")
```

**cmd\_toscreen(*index=None*)**  
Move window to a specified screen.

If index is not specified, we assume the current screen

## Examples

Move window to current screen:

```
toscreen()
```

Move window to screen 0:

```
toscreen(0)
```

```
cmd_up_opacity()
```

### 4.1.2 Built-in Hooks

**classmethod** `subscribe.addgroup(func)`

Called when group is added

#### Arguments

- `window.Window` instance
- name of new group

**classmethod** `subscribe.changegroup(func)`

Called whenever a group change occurs

#### Arguments

None

**classmethod** `subscribe.client_focus(func)`

Called whenever focus changes

#### Arguments

- `window.Window` object of the new focus.

**classmethod** `subscribe.client_killed(func)`

Called after a client has been unmanaged

#### Arguments

- `window.Window` object of the killed window.

**classmethod** `subscribe.client_managed(func)`

Called after Qtile starts managing a new client

Called after a window is assigned to a group, or when a window is made static. This hook is not called for internal windows.

#### Arguments

- `window.Window` object of the managed window

**classmethod** `subscribe.client_mouse_enter(func)`

Called when the mouse enters a client

#### Arguments

- `window.Window` of window entered

**classmethod** `subscribe.client_name_updated(func)`

Called when the client name changes

#### Arguments

- `window.Window` of client with updated name

**classmethod** `subscribe.client_new(func)`

Called before Qtile starts managing a new client

Use this hook to declare windows static, or add them to a group on startup. This hook is not called for internal windows.

#### Arguments

- `window.Window` object

### Examples

```
@libqtile.hook.subscribe.client_new
def func(c):
    if c.name == "xterm":
        c.togroup("a")
    elif c.name == "dzen":
        c.static(0)
```

**classmethod** `subscribe.client_state_changed(func)`

Called whenever client state changes

Never fires

**classmethod** `subscribe.client_type_changed(func)`

Called whenever window type changes

Never fires

**classmethod** `subscribe.client_urgent_hint_changed(func)`

Called when the client urgent hint changes

#### Arguments

- `window.Window` of client with hint change

**classmethod** `subscribe.current_screen_change(func)`

Called when the current screen (i.e. the screen with focus) changes

#### Arguments

None

**classmethod** `subscribe.delgroup(func)`

Called when group is deleted

#### Arguments

- qtile manager instance
- name of deleted group

**classmethod** `subscribe.float_change(func)`

Called when a change in float state is made

#### Arguments

None

**classmethod** `subscribe.focus_change(func)`  
Called when focus is changed

**Arguments**

None

**classmethod** `subscribe.group_window_add(func)`  
Called when a new window is added to a group

**Arguments**

None

**classmethod** `subscribe.layout_change(func)`  
Called on layout change

**Arguments**

- layout object for new layout
- group object on which layout is changed

**classmethod** `subscribe.net_wm_icon_change(func)`  
Called on \_NET\_WM\_ICON chance

**Arguments**

- window.Window of client with changed icon

**classmethod** `subscribe.screen_change(func)`  
Called when a screen is added or screen configuration is changed (via xrandr)

Common usage is simply to call `qtile.cmd_restart()` on each event (to restart qtile when there is a new monitor):

**Arguments**

- qtile manager instance
- xproto.randr.ScreenChangeNotify event

## Examples

```
@libqtile.hook.subscribe.screen_change
def restart_on_randr(qtile, ev):
    qtile.cmd_restart()
```

**classmethod** `subscribe.selection_change(func)`  
Called on selection change

**Arguments**

- name of the selection
- dictionary describing selection, containing owner and selection as keys

**classmethod** `subscribe.selection_notify(func)`  
Called on selection notify

**Arguments**

- name of the selection

- dictionary describing selection, containing owner and selection as keys

**classmethod** `subscribe.setgroup(func)`

Called when group is changed

#### Arguments

None

**classmethod** `subscribe.startup(func)`

Called when qtile is started

#### Arguments

None

**classmethod** `subscribe.startup_complete(func)`

Called when qtile is started after all resources initialized

#### Arguments

None

**classmethod** `subscribe.startup_once(func)`

Called when Qtile has started on first start

This hook is called exactly once per session (i.e. not on each `lazy.restart()`).

#### Arguments

None

**classmethod** `subscribe.window_name_change(func)`

Called whenever a windows name changes

Deprecated: use client\_name\_updated **Arguments**

None

### 4.1.3 Built-in Layouts

#### Floating

```
class libqtile.layout.floating.Floating(float_rules=None, no_reposition_match=None,  
                                     **config)
```

Floating layout, which does nothing with windows but handles focus order

key	default	description
auto_float_types	{'splash', 'dialog', 'notification', 'toolbar', 'utility'}	default wm types to automatically float
border_focus	'#0000ff'	Border colour for the focused window.
border_normal	'#000000'	Border colour for un-focused windows.
border_width	1	Border width.
fullscreen_border_width		Border width for fullscreen.
max_border_width		Border width for maximize.
name	'floating'	Name of this layout.

## Bsp

```
class libqtile.layout.bsp.Bsp(**config)
```

This layout is inspired by bspwm, but it does not try to copy its features.

The first client occupies the entire screen space. When a new client is created, the selected space is partitioned in 2 and the new client occupies one of those subspaces, leaving the old client with the other.

The partition can be either horizontal or vertical according to the dimensions of the current space: if its width/height ratio is above a pre-configured value, the subspaces are created side-by-side, otherwise, they are created on top of each other. The partition direction can be freely toggled. All subspaces can be resized and clients can be shuffled around.

An example key configuration is:

```
Key([mod], "j", lazy.layout.down()),
Key([mod], "k", lazy.layout.up()),
Key([mod], "h", lazy.layout.left()),
Key([mod], "l", lazy.layout.right()),
Key([mod, "shift"], "j", lazy.layout.shuffle_down()),
Key([mod, "shift"], "k", lazy.layout.shuffle_up()),
Key([mod, "shift"], "h", lazy.layout.shuffle_left()),
Key([mod, "shift"], "l", lazy.layout.shuffle_right()),
Key([mod, "mod1"], "j", lazy.layout.flip_down()),
Key([mod, "mod1"], "k", lazy.layout.flip_up()),
Key([mod, "mod1"], "h", lazy.layout.flip_left()),
Key([mod, "mod1"], "l", lazy.layout.flip_right()),
Key([mod, "control"], "j", lazy.layout.grow_down()),
Key([mod, "control"], "k", lazy.layout.grow_up()),
Key([mod, "control"], "h", lazy.layout.grow_left()),
Key([mod, "control"], "l", lazy.layout.grow_right()),
Key([mod, "shift"], "n", lazy.layout.normalize()),
Key([mod], "Return", lazy.layout.toggle_split()),
```

key	default	description
border_focus	'#881111'	Border colour for the focused window.
border_normal	'#220000'	Border colour for un-focused windows.
border_width	2	Border width.
fair	True	New clients are inserted in the shortest branch.
grow_amount	10	Amount by which to grow a window/column.
lower_right	True	New client occupies lower or right subspace.
margin	0	Margin of the layout.
name	'bsp'	Name of this layout.
ratio	1.6	Width/height ratio that defines the partition direction.

## Columns

```
class libqtile.layout.columns.Columns(**config)
```

Extension of the Stack layout.

The screen is split into columns, which can be dynamically added or removed. Each column displays either a single window at a time from a stack of windows or all of them simultaneously, splitting the column space. Columns and windows can be resized and windows can be shuffled around. This layout can also emulate “Wmii”, “Vertical”, and “Max”, depending on the default parameters.

An example key configuration is:

```

Key([mod], "j", lazy.layout.down()),
Key([mod], "k", lazy.layout.up()),
Key([mod], "h", lazy.layout.left()),
Key([mod], "l", lazy.layout.right()),
Key([mod, "shift"], "j", lazy.layout.shuffle_down()),
Key([mod, "shift"], "k", lazy.layout.shuffle_up()),
Key([mod, "shift"], "h", lazy.layout.shuffle_left()),
Key([mod, "shift"], "l", lazy.layout.shuffle_right()),
Key([mod, "control"], "j", lazy.layout.grow_down()),
Key([mod, "control"], "k", lazy.layout.grow_up()),
Key([mod, "control"], "h", lazy.layout.grow_left()),
Key([mod, "control"], "l", lazy.layout.grow_right()),
Key([mod], "Return", lazy.layout.toggle_split()),
Key([mod], "n", lazy.layout.normalize()),

```

key	default	description
autosplit	True	Autosplit newly created columns.
border_focus	'#881111'	Border colour for the focused window.
border_normal	'#220000'	Border colour for un-focused windows.
border_width	2	Border width.
fair	False	Add new windows to the column with least windows.
grow_amount	10	Amount by which to grow a window/column.
margin	0	Margin of the layout.
name	'columns'	Name of this layout.
num_columns	2	Preferred number of columns.

## Matrix

**class** libqtile.layout.matrix.**Matrix**(columns=2, \*\*config)

This layout divides the screen into a matrix of equally sized cells and places one window in each cell. The number of columns is configurable and can also be changed interactively.

key	default	description
border_focus	'#0000ff'	Border colour for the focused window.
border_normal	'#000000'	Border colour for un-focused windows.
border_width	1	Border width.
margin	0	Margin of the layout
name	'matrix'	Name of this layout.

## Max

**class** libqtile.layout.max.**Max**(\*\*config)

Maximized layout

A simple layout that only displays one window at a time, filling the screen. This is suitable for use on laptops and other devices with small screens. Conceptually, the windows are managed as a stack, with commands to switch to next and previous windows in the stack.

key	default	description
name	'max'	Name of this layout.

## MonadTall

```
class libqtile.layout.xmonad.MonadTall (**config)
    Emulate the behavior of XMonad's default tiling scheme.
```

Main-Pane:

A main pane that contains a single window takes up a vertical portion of the screen based on the ratio setting. This ratio can be adjusted with the cmd\_grow\_main and cmd\_shrink\_main or, while the main pane is in focus, cmd\_grow and cmd\_shrink.




Using the cmd\_flip method will switch which horizontal side the main pane will occupy. The main pane is considered the “top” of the stack.




Secondary-panes:

Occupying the rest of the screen are one or more secondary panes. The secondary panes will share the vertical space of the screen however they can be resized at will with the cmd\_grow and cmd\_shrink methods. The other secondary panes will adjust their sizes to smoothly fill all of the space.

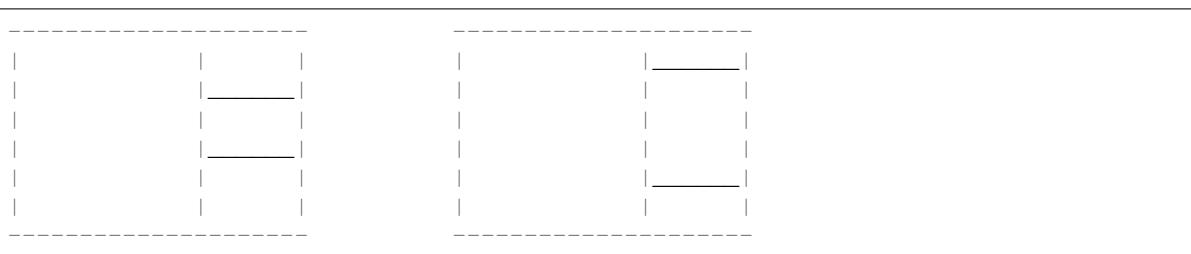

Panes can be moved with the cmd\_shuffle\_up and cmd\_shuffle\_down methods. As mentioned the main pane is considered the top of the stack; moving up is counter-clockwise and moving down is clockwise.

The opposite is true if the layout is “flipped”.

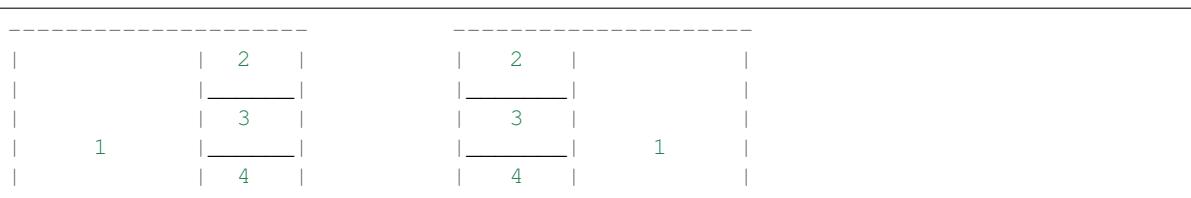

(continues on next page)

(continued from previous page)



Normalizing:

To restore all client windows to their default size ratios simply use the `cmd_normalize` method.

Maximizing:

To toggle a client window between its minimum and maximum sizes simply use the `cmd_maximize` on a focused client.

Suggested Bindings:

```
Key([modkey], "h", lazy.layout.left()),
Key([modkey], "l", lazy.layout.right()),
Key([modkey], "j", lazy.layout.down()),
Key([modkey], "k", lazy.layout.up()),
Key([modkey, "shift"], "h", lazy.layout.swap_left()),
Key([modkey, "shift"], "l", lazy.layout.swap_right()),
Key([modkey, "shift"], "j", lazy.layout.shuffle_down()),
Key([modkey, "shift"], "k", lazy.layout.shuffle_up()),
Key([modkey], "i", lazy.layout.grow()),
Key([modkey], "m", lazy.layout.shrink()),
Key([modkey], "n", lazy.layout.normalize()),
Key([modkey], "o", lazy.layout.maximize()),
Key([modkey, "shift"], "space", lazy.layout.flip()),
```

key	default	description
align	0	Which side master plane will be placed (one of <code>MonadTall._left</code> or <code>MonadTall._right</code> )
border_focus	'#ff0000'	Border colour for the focused window.
border_normal	'#000000'	Border colour for un-focused windows.
border_width	2	Border width.
change_ratio	0.05	Resize ratio
change_size	20	Resize change in pixels
margin	0	Margin of the layout
max_ratio	0.75	The percent of the screen-space the master pane should occupy at maximum.
min_ratio	0.25	The percent of the screen-space the master pane should occupy at minimum.
min_secondary_size		minimum size in pixel for a secondary pane window
name	'xmonadTall'	Name of this layout.
new_at_current	False	Place new windows at the position of the active window.
ratio	0.5	The percent of the screen-space the master pane should occupy by default.
single_border_width		Border width for single window

## MonadWide

```
class libqtile.layout.xmonad.MonadWide(**config)
```

Emulate the behavior of XMonad's horizontal tiling scheme.

This layout attempts to emulate the behavior of XMonad wide tiling scheme.

### Main-Pane:

A main pane that contains a single window takes up a horizontal portion of the screen based on the ratio setting. This ratio can be adjusted with the `cmd_grow_main` and `cmd_shrink_main` or, while the main pane is in focus, `cmd_grow` and `cmd_shrink`.




Using the `cmd_flip` method will switch which vertical side the main pane will occupy. The main pane is considered the “top” of the stack.




### Secondary-panes:

Occupying the rest of the screen are one or more secondary panes. The secondary panes will share the horizontal space of the screen however they can be resized at will with the `cmd_grow` and `cmd_shrink` methods. The other secondary panes will adjust their sizes to smoothly fill all of the space.

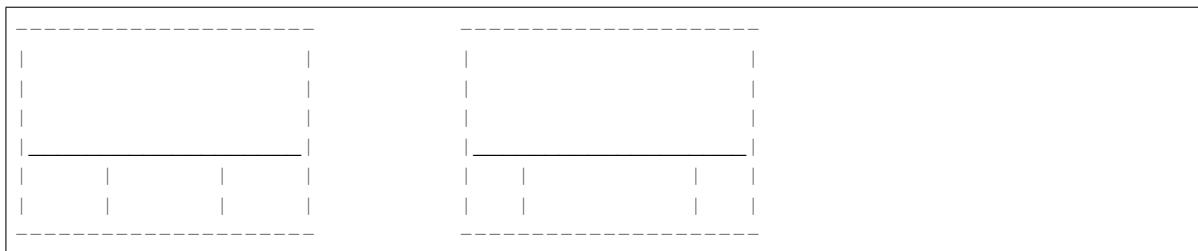

Panes can be moved with the `cmd_shuffle_up` and `cmd_shuffle_down` methods. As mentioned the main pane is considered the top of the stack; moving up is counter-clockwise and moving down is clockwise.

The opposite is true if the layout is “flipped”.

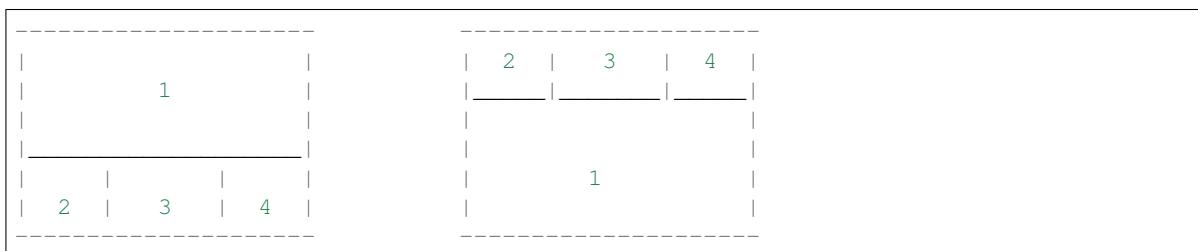

### Normalizing:

To restore all client windows to their default size ratios simply use the `cmd_normalize` method.

Maximizing:

To toggle a client window between its minimum and maximum sizes simply use the cmd\_maximize on a focused client.

Suggested Bindings:

```
Key([modkey], "h", lazy.layout.left()),
Key([modkey], "l", lazy.layout.right()),
Key([modkey], "j", lazy.layout.down()),
Key([modkey], "k", lazy.layout.up()),
Key([modkey, "shift"], "h", lazy.layout.swap_left()),
Key([modkey, "shift"], "l", lazy.layout.swap_right()),
Key([modkey, "shift"], "j", lazy.layout.shuffle_down()),
Key([modkey, "shift"], "k", lazy.layout.shuffle_up()),
Key([modkey], "i", lazy.layout.grow()),
Key([modkey], "m", lazy.layout.shrink()),
Key([modkey], "n", lazy.layout.normalize()),
Key([modkey], "o", lazy.layout.maximize()),
Key([modkey, "shift"], "space", lazy.layout.flip()),
```

key	default	description
align	0	Which side master plane will be placed (one of MonadTall._left or MonadTall._right)
border_focus	'#ff0000'	Border colour for the focused window.
border_normal	'#000000'	Border colour for un-focused windows.
border_width	2	Border width.
change_ratio	0.05	Resize ratio
change_size	20	Resize change in pixels
margin	0	Margin of the layout
max_ratio	0.75	The percent of the screen-space the master pane should occupy at maximum.
min_ratio	0.25	The percent of the screen-space the master pane should occupy at minimum.
min_secondary_size		minimum size in pixel for a secondary pane window
name	'xmonadtall'	Name of this layout.
new_at_current	False	Place new windows at the position of the active window.
ratio	0.5	The percent of the screen-space the master pane should occupy by default.
single_border_width		Border width for single window

## RatioTile

```
class libqtile.layout.ratiotile.RatioTile(**config)
```

Tries to tile all windows in the width/height ratio passed in

key	default	description
border_focus	'#0000ff'	Border colour for the focused window.
border_normal	'#000000'	Border colour for un-focused windows.
border_width	1	Border width.
fancy	False	Use a different method to calculate window sizes.
margin	0	Margin of the layout
name	'ratiotile'	Name of this layout.
ratio	1.618	Ratio of the tiles
ratio_incremen	t0.1	Amount to increment per ratio increment

## Slice

```
class libqtile.layout.slice.Slice(**config)
```

Slice layout

This layout cuts piece of screen and places a single window on that piece, and delegates other window placement to other layout

key	default	description
fallback	<libqtile.layout.max.Max object at 0x7fb69e98fcc0>	Fallback layout
name	'max'	Name of this layout.
role	None	WM_WINDOW_ROLE to match
side	'left'	Side of the slice (left, right, top, bottom)
width	256	Slice width
wmclass	None	WM_CLASS to match
wname	None	WM_NAME to match

## Stack

```
class libqtile.layout.stack.Stack(**config)
```

A layout composed of stacks of windows

The stack layout divides the screen horizontally into a set of stacks. Commands allow you to switch between stacks, to next and previous windows within a stack, and to split a stack to show all windows in the stack, or unsplit it to show only the current window.

Unlike the columns layout the number of stacks is fixed.

key	default	description
autosplit	False	Auto split all new stacks.
border_focus	'#0000ff'	Border colour for the focused window.
border_normal	'#000000'	Border colour for un-focused windows.
border_width	1	Border width.
fair	False	Add new windows to the stacks in a round robin way.
margin	0	Margin of the layout
name	'stack'	Name of this layout.
num_stacks	2	Number of stacks.

## Tile

```
class libqtile.layout.tile.Tile(ratio=0.618, masterWindows=1, expand=True, ratio_increment=0.05, add_on_top=True, add_after_last=False, shift_windows=False, master_match=None, **config)
```

key	default	description
border_focus	'#0000ff'	Border colour for the focused window.
border_normal	'#000000'	Border colour for un-focused windows.
border_width	1	Border width.
margin	0	Margin of the layout
name	'tile'	Name of this layout.

## TreeTab

```
class libqtile.layout.tree.TreeTab(**config)
Tree Tab Layout
```


This layout works just like Max but displays tree of the windows at the left border of the screen, which allows you to overview all opened windows. It's designed to work with `uzbl-browser` but works with other windows too.

key	default	description
active_bg	'000080'	Background color of active tab
active_fg	'ffffff'	Foreground color of active tab
bg_color	'000000'	Background color of tabs
border_width	2	Width of the border
font	'sans'	Font
fontshadow	None	font shadow color, default is None (no shadow)
fontsize	14	Font pixel size.
inactive_bg	'606060'	Background color of inactive tab
inactive_fg	'ffffff'	Foreground color of inactive tab
level_shift	8	Shift for children tabs
margin_left	6	Left margin of tab panel
margin_y	6	Vertical margin of tab panel
name	'treetab'	Name of this layout.
padding_left	6	Left padding for tabs
padding_x	6	Left padding for tab label
padding_y	2	Top padding for tab label
panel_width	150	Width of the left panel
previous_on_rm	False	Focus previous window on close instead of first.
section_bottom	6	Bottom margin of section
section_fg	'ffffff'	Color of section label
section_fontsize	16	Font pixel size of section label
section_left	4	Left margin of section label
section_padding	4	Bottom of margin section label
section_top	4	Top margin of section label
sections	['Default']	Foreground color of inactive tab
vspace	2	Space between tabs

## VerticalTile

```
class libqtile.layout.verticaltile.VerticalTile(**config)
    Tiling layout that works nice on vertically mounted monitors
```

The available height gets divided by the number of panes, if no pane is maximized. If one pane has been maximized, the available height gets split in master- and secondary area. The maximized pane (master pane) gets the full height of the master area and the other panes (secondary panes) share the remaining space. The master area (at default 75%) can grow and shrink via keybindings.

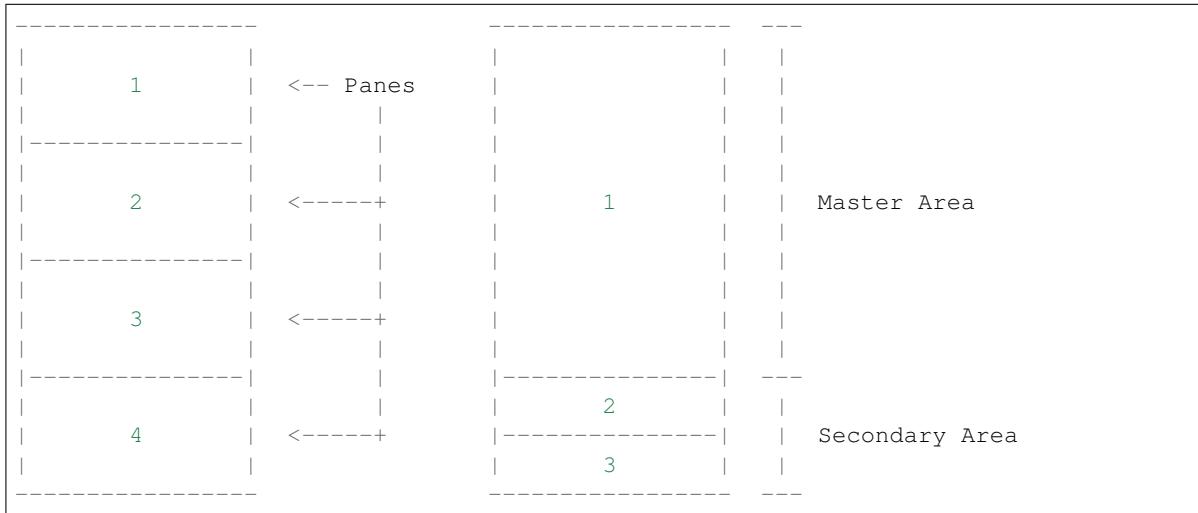

Normal behavior. No One maximized pane in the master area maximized pane. No and two secondary panes in the specific areas. secondary area.

```
----- In some cases VerticalTile can be
|   useful on horizontal mounted
|   monitors two.
|   For example if you want to have a
|   webbrowser and a shell below it.
|-----|
|   1
|   |
|   |
|-----|
|   2
|   |
|   |
-----|
```

Suggested keybindings:

```
Key([modkey], 'j', lazy.layout.down()),
Key([modkey], 'k', lazy.layout.up()),
Key([modkey], 'Tab', lazy.layout.next()),
Key([modkey, 'shift'], 'Tab', lazy.layout.next()),
Key([modkey, 'shift'], 'j', lazy.layout.shuffle_down()),
Key([modkey, 'shift'], 'k', lazy.layout.shuffle_up()),
Key([modkey], 'm', lazy.layout.maximize()),
Key([modkey], 'n', lazy.layout.normalize()),
```

key	default	description
border_focus	'#FF0000'	Border color for the focused window.
border_normal	'#FFFFFF'	Border color for un-focused windows.
border_width	1	Border width.
margin	0	Border margin.
name	'verticaltile'	Name of this layout.

## Wmii

**class** libqtile.layout.wmii.**Wmii** (\*\*config)

This layout emulates wmii layouts

The screen is split into columns, always starting with one. A new window is created in the active window's column. Windows can be shifted left and right. If there is no column when shifting, a new one is created. Each column can be stacked or divided (equally split).

This layout implements something akin to wmii's semantics.

Each group starts with one column. The first window takes up the whole screen. Next window splits the column in half. Windows can be moved to the column to the left or right. If there is no column in the direction being moved into, a new column is created.

Each column can be either stacked (each window takes up the whole vertical real estate) or split (the windows are split equally vertically in the column). Columns can be grown horizontally (cmd\_grow\_left/right).

My config.py has the following added:

```
Key(
    [mod, "shift", "control"], "l",
    lazy.layout.grow_right()
),
Key(
    [mod, "shift"], "l",
    lazy.layout.shuffle_right()
),
Key(
    [mod, "shift", "control"], "h",
    lazy.layout.grow_left()
),
Key(
    [mod, "shift"], "h",
    lazy.layout.shuffle_left()
),
Key(
    [mod], "s",
    lazy.layout.toggle_split()
),
```

key	default	description
border_focus	'#881111'	Border colour for the focused window.
border_focus_st	'#0000ff'	Border colour for un-focused windows.
border_normal	'#220000'	Border colour for un-focused windows.
border_normal_st	'#000022'	Border colour for un-focused windows.
border_width	2	Border width.
grow_amount	5	Amount by which to grow/shrink a window.
margin	0	Margin of the layout
name	'wmii'	Name of this layout.

## Zoomy

**class** libqtile.layout.zoomy.Zoomy (\*\*config)

A layout with single active windows, and few other previews at the right

key	default	description
columnwidth	150	Width of the right column
margin	0	Margin of the layout
name	'zoomy'	Name of this layout.
property_big	'1.0'	Property value to set on normal window
property_name	'ZOOM'	Property to set on zoomed window
property_small	'0.1'	Property value to set on zoomed window

## 4.1.4 Built-in Widgets

### AGroupBox

**class** libqtile.widget.AGroupBox (\*\*config)

A widget that graphically displays the current group

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
border	'000000'	group box border color
borderwidth	3	Current group border width
center_aligned	False	center-aligned group box
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.

### Backlight

**class** libqtile.widget.Backlight (\*\*config)

A simple widget to show the current brightness of a monitor

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
backlight_name	'acpi_video0'	ACPI name of a backlight device
brightness_file	'brightness'	Name of file with the current brightness in /sys/class/backlight/backlight_name
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
format	'{percent: 2.0%}'	Display format
markup	False	Whether or not to use pango markup
max_brightness	<del>max_brightness</del>	Name of file with the maximum brightness in /sys/class/backlight/backlight_name
padding	None	Padding. Calculated if None.
step	10	Percent of backlight every scroll changed
update_interval	10.2	The delay in seconds between updates

## Battery

```
class libqtile.widget.Battery(**config)
A simple but flexible text-based battery widget
```

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
battery_name	'BAT0'	ACPI name of a battery, usually BAT0
charge_char	'^'	Character to indicate the battery is charging
discharge_char	'V'	Character to indicate the battery is discharging
energy_full_file	None	Name of file with the maximum energy in /sys/class/power_supply/battery_name
energy_now_file	None	Name of file with the current energy in /sys/class/power_supply/battery_name
error_message	'Error'	Error message if something is wrong
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
format	'{char}{percent:2.0%}{hour:d}:{min:02d}'	Display format
hide_threshold	None	Hide the text when there is enough energy
low_foreground	'FF0000'	Font color on low battery
low_percentage	0.1	Indicates when to use the low_foreground color $0 < x < 1$
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
power_now_file	None	Name of file with the current power draw in /sys/class/power_supply/battery_name
status_file	'status'	Name of status file in /sys/class/power_supply/battery_name
update_delay	60	The delay in seconds between updates

## BatteryIcon

```
class libqtile.widget.BatteryIcon(**config)
    Battery life indicator widget.
```

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
battery_name	'BAT0'	ACPI name of a battery, usually BAT0
custom_icons	{ }	dict containing key->filename icon map
energy_full_file	None	Name of file with the maximum energy in /sys/class/power_supply/battery_name
energy_now_file	None	Name of file with the current energy in /sys/class/power_supply/battery_name
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
power_now_file	None	Name of file with the current power draw in /sys/class/power_supply/battery_name
status_file	'status'	Name of status file in /sys/class/power_supply/battery_name
theme_path	'/home/docs/checkouts/readthedocs.org/user_builds/qtile/checkouts/v0.12.0/libqtile/resources/battery-icons'	Path of the icons
update_delay	60	The delay in seconds between updates

## BitcoinTicker

```
class libqtile.widget.BitcoinTicker(**config)
```

A bitcoin ticker widget, data provided by the coinbase.com API. Defaults to displaying currency in whatever the current locale is. Examples:

```
# display the average price of bitcoin in local currency
widget.BitcoinTicker()

# display it in Euros:
widget.BitcoinTicker(currency="EUR")
```

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
currency	''	The currency the value that bitcoin is displayed in
data	None	Post Data
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
headers	{ }	Extra Headers
json	True	Is Json?
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
parse	None	Parse Function
update_interval	1600	Update interval in seconds, if none, the widget updates whenever the event loop is idle.
url	None	Url
user_agent	'Qtile'	Set the user agent
xml	False	Is XML?

## CPUGraph

```
class libqtile.widget.CPUGraph(**config)
```

Display CPU usage graph

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
border_color	'215578'	Widget border color
border_width	2	Widget border width
core	'all'	Which core to show (all/0/1/2/...)
fill_color	'1667EB.3'	Fill color for linefill graph
frequency	1	Update frequency in seconds
graph_color	'18BAEB'	Graph color
line_width	3	Line width
margin_x	3	Margin X
margin_y	3	Margin Y
samples	100	Count of graph samples.
start_pos	'bottom'	Drawer starting position ('bottom'/'top')
type	'linefill'	'box', 'line', 'linefill'

## Canto

```
class libqtile.widget.Canto(**config)
```

Display RSS feeds updates using the canto console reader

Supported bar orientations: horizontal only

key	default	description
all_format	'{number}'	All feeds display format
background	None	Widget background color
feeds	[]	List of feeds to display, empty for all
fetch	False	Whether to fetch new items on update
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
markup	False	Whether or not to use pango markup
one_format	'{name} : {number}'	One feed display format
padding	None	Padding. Calculated if None.
update_interval	1600	Update interval in seconds, if none, the widget updates whenever the event loop is idle.

## CheckUpdates

```
class libqtile.widget.CheckUpdates (**config)
Shows number of pending updates in different unix systems
```

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
colour_have_update	#ffff00	Colour when there are updates.
colour_no_update	#0000ff	Colour when there's no updates.
display_format	'Updates: {updates}'	Display format if updates available
distro	'Arch'	Name of your distribution
execute	None	Command to execute on click
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
update_interval	160	Update interval in seconds.

## Clipboard

```
class libqtile.widget.Clipboard (width=CALCULATED, **config)
Display current clipboard contents
```

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
blacklist	[ 'keepassx' ]	list with blacklisted wm_class, sadly not every clipboard window sets them, keepassx does.Clipboard contents from blacklisted wm_classes will be replaced by the value of blacklist_text.
blacklist_text	'*****'	text to display when the wm_class is blacklisted
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
markup	False	Whether or not to use pango markup
max_width	10	maximum number of characters to display (None for all, useful when width is bar.STRETCH)
padding	None	Padding. Calculated if None.
selection	'CLIPBOARD'	the selection to display(CLIPBOARD or PRIMARY)
timeout	10	Default timeout (seconds) for display text, None to keep forever

## Clock

```
class libqtile.widget.Clock(**config)
```

A simple but flexible text-based clock

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
format	'%H:%M'	A Python datetime format string
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
timezone	None	The timezone to use for this clock, e.g. "US/Central" (or anything in /usr/share/zoneinfo). None means the default timezone.
update_interval	1.0	Update interval for the clock

## Cmus

```
class libqtile.widget.Cmus(**config)
```

A simple Cmus widget.

Show the artist and album of now listening song and allow basic mouse control from the bar:

- toggle pause (or play if stopped) on left click;
- skip forward in playlist on scroll up;
- skip backward in playlist on scroll down.

Cmus (<https://cmus.github.io>) should be installed.

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
markup	False	Whether or not to use pango markup
max_chars	0	Maximum number of characters to display in widget.
noplay_color	'cecece'	Text colour when not playing.
padding	None	Padding. Calculated if None.
play_color	'00ff00'	Text colour when playing.
update_interval	10.5	Update Time in seconds.

## Countdown

```
class libqtile.widget.Countdown(**config)
```

A simple countdown timer text widget

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
date	datetime.datetime(2018, 7, 21, 0, 4, 34, 19668)	The datetime for the end of the countdown
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
format	'{D}d {H}h {M}m {S}s'	Format of the displayed text. Available variables:{D} == days, {H} == hours, {M} == minutes, {S} seconds.
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
update_interval	11.0	Update interval in seconds for the clock

## CurrentLayout

```
class libqtile.widget.CurrentLayout(width=CALCULATED, **config)
```

Display the name of the current layout of the current group of the screen, the bar containing the widget, is on.

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.

## CurrentLayoutIcon

```
class libqtile.widget.CurrentLayoutIcon (**config)
```

Display the icon representing the current layout of the current group of the screen on which the bar containing the widget is.

If you are using custom layouts, a default icon with question mark will be displayed for them. If you want to use custom icon for your own layout, for example, *FooGrid*, then create a file named “layout-foogrid.png” and place it in *~/icons* directory. You can as well use other directories, but then you need to specify those directories in *custom\_icon\_paths* argument for this plugin.

The order of icon search is:

- dirs in *custom\_icon\_paths* config argument
- *~/icons*
- built-in qtile icons

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
custom_icon_paths		List of folders where to search icons before using built-in icons or icons in <i>~/icons</i> dir. This can also be used to provide missing icons for custom layouts. Defaults to empty list.
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
scale	1	Scale factor relative to the bar height. Defaults to 1

## CurrentScreen

```
class libqtile.widget.CurrentScreen (width=CALCULATED, **config)
```

Indicates whether the screen this widget is on is currently active or not

Supported bar orientations: horizontal only

key	default	description
active_color	'00ff00'	Color when screen is active
active_text	'A'	Text displayed when the screen is active
background	None	Widget background color
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
inactive_color	'ff0000'	Color when screen is inactive
inactive_text	'I'	Text displayed when the screen is inactive
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.

## DF

```
class libqtile.widget.DF (**config)
Disk Free Widget
```

By default the widget only displays if the space is less than warn\_space.

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
format	'{p}\n({uf} {m}   {r:.0f}%)'	String format (p: partition, s: size, f: free space, uf: user free space, m: measure, r: ratio (uf/s))
markup	False	Whether or not to use pango markup
measure	'G'	Measurement (G, M, B)
padding	None	Padding. Calculated if None.
partition	'/'	the partition to check space
update_interval	160	The update interval.
visible_on_warn	True	Only display if warning
warn_color	'ff0000'	Warning color
warn_space	2	Warning space in scale defined by the measure option.

## DebugInfo

```
class libqtile.widget.DebugInfo (**config)
```

Displays debugging infos about selected window

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.

## GenPollText

```
class libqtile.widget.GenPollText (**config)
```

A generic text widget that polls using poll function to get the text

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
func	None	Poll Function
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
update_interval	1600	Update interval in seconds, if none, the widget updates whenever the event loop is idle.

## GenPollUrl

```
class libqtile.widget.GenPollUrl(**config)
```

A generic text widget that polls an url and parses it using parse function

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
data	None	Post Data
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
headers	{ }	Extra Headers
json	True	Is Json?
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
parse	None	Parse Function
update_interval	1600	Update interval in seconds, if none, the widget updates whenever the event loop is idle.
url	None	Url
user_agent	'Qtile'	Set the user agent
xml	False	Is XML?

## GmailChecker

```
class libqtile.widget.GmailChecker(**config)
```

A simple gmail checker

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
email_path	'INBOX'	email_path
fmt	'inbox[%s], unseen[%s]'	fmt
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffffff'	Foreground colour
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
password	None	password
status_only_unseen	False	Only show unseen messages
update_interval	130	Update time in seconds.
username	None	username

## GroupBox

```
class libqtile.widget.GroupBox(**config)
```

A widget that graphically displays the current group. All groups are displayed by their label. If the label of a group is the empty string that group will not be displayed.

Supported bar orientations: horizontal only

key	default	description
active	'FFFFFF'	Active group font colour
background	None	Widget background color
borderwidth	3	Current group border width
center_aligned	False	center-aligned group box
disable_drag	False	Disable dragging and dropping of group names on widget
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
highlight_color	['000000', '282828']	Active group highlight color when using 'line' highlight method.
highlight_method	'border'	Method of highlighting ('border', 'block', 'text', or 'line')Uses *_border color settings
inactive	'404040'	Inactive group font colour
invert_mouse_wheel	False	Whether to invert mouse wheel group movement
markup	False	Whether or not to use pango markup
other_current_screen_border	'#000000'	Border or line colour for group on other screen when focused.
other_screen_border	'#004040'	Border or line colour for group on other screen when unfocused.
padding	None	Padding. Calculated if None.
rounded	True	To round or not to round box borders
spacing	None	Spacing between groups(if set to None, will be equal to margin_x)
this_current_screen_border	'#000000'	Border or line colour for group on this screen when focused.
this_screen_border	'#000000'	Border or line colour for group on this screen when unfocused.
urgent_alert_method	'border'	Method for alerting you of WM urgent hints (one of 'border', 'text', 'block', or 'line')
urgent_border	'FF0000'	Urgent border or line color
urgent_text	'FF0000'	Urgent group font color
use_mouse_wheel	True	Whether to use mouse wheel events
visible_groups	None	Groups that will be visible. If set to None or [], all groups will be visible. Visible groups are identified by name not by their displayed label.

## HDDBusyGraph

```
class libqtile.widget.HDDBusyGraph(**config)
```

Display HDD busy time graph

Parses /sys/block/<dev>/stat file and extracts overall device IO usage, based on io\_ticks's value. See <https://www.kernel.org/doc/Documentation/block/stat.txt>

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
border_color	'215578'	Widget border color
border_width	2	Widget border width
device	'sda'	Block device to display info for
fill_color	'1667EB.3'	Fill color for linefill graph
frequency	1	Update frequency in seconds
graph_color	'18BAEB'	Graph color
line_width	3	Line width
margin_x	3	Margin X
margin_y	3	Margin Y
samples	100	Count of graph samples.
start_pos	'bottom'	Drawer starting position ('bottom'/'top')
type	'linefill'	'box', 'line', 'linefill'

## HDDGraph

```
class libqtile.widget.HDDGraph (**config)
```

Display HDD free or used space graph

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
border_color	'215578'	Widget border color
border_width	2	Widget border width
fill_color	'1667EB.3'	Fill color for linefill graph
frequency	1	Update frequency in seconds
graph_color	'18BAEB'	Graph color
line_width	3	Line width
margin_x	3	Margin X
margin_y	3	Margin Y
path	'/'	Partition mount point.
samples	100	Count of graph samples.
space_type	'used'	free/used
start_pos	'bottom'	Drawer starting position ('bottom'/'top')
type	'linefill'	'box', 'line', 'linefill'

## IdleRPG

```
class libqtile.widget.IdleRPG (**config)
```

A widget for monitoring and displaying IdleRPG stats.

```
# display idlerpg stats for the player 'pants' on freenode's #idlerpg
widget.IdleRPG(url="http://xethron.lolhosting.net/xml.php?player=pants")
```

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
data	None	Post Data
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
format	'IdleRPG: {online} TTL: {ttl}'	Display format
headers	{ }	Extra Headers
json	False	Not json :)
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
parse	None	Parse Function
update_interval	1600	Update interval in seconds, if none, the widget updates whenever the event loop is idle.
url	None	Url
user_agent	'Qtile'	Set the user agent
xml	True	Is XML :)

## Image

```
class libqtile.widget.Image (length=CALCULATED, width=None, **config)
```

Display a PNG image on the bar

Supported bar orientations: horizontal and vertical

key	default	description
background	None	Widget background color
filename	None	PNG Image filename. Can contain '~'
scale	True	Enable/Disable image scaling

## ImapWidget

```
class libqtile.widget.ImapWidget (**config)
```

Email IMAP widget

This widget will scan one of your imap email boxes and report the number of unseen messages present. I've configured it to only work with imap with ssl. Your password is obtained from the Gnome Keyring.

Writing your password to the keyring initially is as simple as (changing out <userid> and <password> for your userid and password):

1. create the file `~/.local/share/python_keyring/keyringrc.cfg` with the following contents:

```
[backend]
default-keyring=keyring.backends.Gnome.Keyring
keyring-path=/home/<userid>/.local/share/keyring/
```

2. Execute the following python shell script once:

```
#!/usr/bin/env python3
import keyring
user = <userid>
password = <password>
keyring.set_password('imapwidget', user, password)
```

mbox names must include the path to the mbox (except for the default INBOX). So, for example if your mailroot is ~/Maildir, and you want to look at the mailbox at HomeMail/fred, the mbox setting would be: `mbox="~/Maildir/HomeMail/fred"`. Note the nested sets of quotes! Labels can be whatever you choose, of course.

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
label	'INBOX'	label for display
markup	False	Whether or not to use pango markup
mbox	'INBOX'	mailbox to fetch
padding	None	Padding. Calculated if None.
server	None	email server name
update_interval	1600	Update interval in seconds, if none, the widget updates whenever the event loop is idle.
user	None	email username

## KeyboardKbdd

```
class libqtile.widget.KeyboardKbdd(**config)
Widget for changing keyboard layouts per window, using kbdd
```

kbdd should be installed and running, you can get it from: <https://github.com/qnikst/kbdd>

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
colours	None	foreground colour for each layout either 'None' or a list of colours.example: ['ffffff', 'E6F0AF'].
configured_keyboards	['us', 'ir']	your predefined list of keyboard layouts.example: ['us', 'ir', 'es']
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
update_interval	11	Update interval in seconds.

## KeyboardLayout

```
class libqtile.widget.KeyboardLayout (**config)
    Widget for changing and displaying the current keyboard layout
```

It requires setxkbmap to be available in the system.

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
configured_keyboard_layouts	[ ]	A list of predefined keyboard layouts represented as strings. For example: ['us', 'us colemak', 'es', 'fr'].
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
update_interval	1	Update time in seconds.

## KhalCalendar

```
class libqtile.widget.KhalCalendar (**config)
    Khal calendar widget
```

This widget will display the next appointment on your Khal calendar in the qtile status bar. Appointments within the “reminder” time will be highlighted.

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'FFFF33'	default foreground color
lookahead	7	days to look ahead in the calendar
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
reminder_color	'FF0000'	color of calendar entries during reminder time
remindertime	10	reminder time in minutes
update_interval	1600	Update interval in seconds, if none, the widget updates whenever the event loop is idle.

## LaunchBar

```
class libqtile.widget.LaunchBar (progs=None, width=CALCULATED, **config)
    A widget that display icons to launch the associated command
```

### Parameters

**progs :** a list of tuples (software\_name, command\_to\_execute, comment), for example:

```
('thunderbird', 'thunderbird -safe-mode', 'launch thunderbird in
˓→safe mode')
('logout', 'qshell:self.qtile.cmd_shutdown()', 'logout from qtile')
```

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
default_icon	'/usr/share/ icons/ oxygen/ 256x256/ mimetypes/ application-x-executable. png'	Default icon not found
padding	2	Padding between icons

## Maildir

```
class libqtile.widget.Maildir(**config)
A simple widget showing the number of new mails in maildir mailboxes
```

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
maildirPath	'~/Mail'	path to the Maildir folder
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
separator	' '	the string to put between the subfolder strings.
subFolders	[]	The subfolders to scan (e.g. [{"path": "INBOX", "label": "Home mail"}, {"path": "spam", "label": "Home junk"}])
update_interval	1600	Update interval in seconds, if none, the widget updates whenever the event loop is idle.

## Memory

```
class libqtile.widget.Memory(**config)
Displays memory usage
```

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
fmt	'{MemUsed}M/{MemTotal}M'	see /proc/meminfo for field names
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
update_interval	1600	Update interval in seconds, if none, the widget updates whenever the event loop is idle.

## MemoryGraph

**class** libqtile.widget.MemoryGraph (\*\*config)

Displays a memory usage graph

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
border_color	'215578'	Widget border color
border_width	2	Widget border width
fill_color	'1667EB.3'	Fill color for linefill graph
frequency	1	Update frequency in seconds
graph_color	'18BAEB'	Graph color
line_width	3	Line width
margin_x	3	Margin X
margin_y	3	Margin Y
samples	100	Count of graph samples.
start_pos	'bottom'	Drawer starting position ('bottom'/'top')
type	'linefill'	'box', 'line', 'linefill'

## Moc

**class** libqtile.widget.Moc (\*\*config)

A simple MOC widget.

Show the artist and album of now listening song and allow basic mouse control from the bar:

- toggle pause (or play if stopped) on left click;
- skip forward in playlist on scroll up;
- skip backward in playlist on scroll down.

MOC (<http://moc.daper.net>) should be installed.

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
markup	False	Whether or not to use pango markup
max_chars	0	Maximum number of characters to display in widget.
noplay_color	'cecece'	Text colour when not playing.
padding	None	Padding. Calculated if None.
play_color	'00ff00'	Text colour when playing.
update_interval	10.5	Update Time in seconds.

## Mpd

```
class libqtile.widget.Mpd(**config)
A widget for the Music Player Daemon (MPD)
```

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
do_color_progress	False	Whether to indicate progress in song by altering message color
fmt_playing	'%a - %t [%v%%]'	Format string to display when playing/paused
fmt_stopped	'Stopped [%v%%]'	Format strings to display when stopped
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
foreground_progress	'ffff00ff'	Foreground progress colour
host	'localhost'	Host to connect to, can be either an IP address or a UNIX socket path
markup	False	Whether or not to use pango markup
msg_nc	'Mpd off'	Which message to show when we're not connected
padding	None	Padding. Calculated if None.
password	None	Password to use
port	6600	Port to connect to
reconnect	False	Attempt to reconnect if initial connection failed
reconnect_interval		Time to delay between connection attempts.
update_interval	10.5	Update Time in seconds.

## Mpd2

```
class libqtile.widget.Mpd2(status_format='{play_status} {artist}/{title} [{re-  
peat}{random}{single}{consume}{updating_db}]',  
    pre-  
pare_status={'consume': <function option.<locals>._convert at  
0x7fb69e899840>, 'random': <function option.<locals>._convert at  
0x7fb69e899730>, 'repeat': <function option.<locals>._convert at  
0x7fb69e8996a8>, 'single': <function option.<locals>._convert  
at 0x7fb69e8997b8>, 'updating_db': <function op-  
tion.<locals>._convert at 0x7fb69e8998c8>}, **config)
```

A widget for Music Player Daemon (MPD) based on python-mpd2

This widget exists since python-mpd library is no more supported.

### Parameters

**status\_format :** format string to display status

Full list of values see in `status` and `currentsong` commands

[https://musicpd.org/doc/protocol/command\\_reference.html#command\\_status](https://musicpd.org/doc/protocol/command_reference.html#command_status)      <https://musicpd.org/doc/protocol/tags.html>

Default:

```
{play_status} {artist}/{title} [{repeat}{random}{single}{consume}  
↪{updating_db}]
```

`play_status` is string from `play_states` dict

Note that `time` property of song renamed to `fulltime` to prevent conflicts with status information during formating.

**prepare\_status :** dict of functions for replace values in status with custom

```
f(status, key, space_element) => str
```

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
command	None	Executable command by “command” shortcut
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
host	'localhost'	Host of mpd server
idletimeout	5	MPDClient idle command timeout
keys	{'command': None, 'next': 5, 'previous': 4, 'stop': 3, 'toggle': 1}	Shortcut keys
markup	False	Whether or not to use pango markup
no_connection	'No connection'	Text when mpd is disconnected
padding	None	Padding. Calculated if None.
password	None	Password for auth on mpd server
play_states	{'pause': '', 'play': '', 'stop': ''}	Play state mapping
port	6600	Port of mpd server
space	'-'	Space keeper
timeout	30	MPDClient timeout
update_interval	11	Interval of update widget

## Mpris

```
class libqtile.widget.Mpris(**config)
    MPRIS player widget
```

A widget which displays the current track/artist of your favorite MPRIS player. It should work with all players which implement a reasonably correct version of MPRIS, though I have only tested it with clementine.

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
markup	False	Whether or not to use pango markup
name	'clementine'	Name of the widget
objname	'org.mpris. clementine'	DBUS object to connect to
padding	None	Padding. Calculated if None.
stop_pause_text	'Stopped'	Optional text to display when in the stopped/paused state

## Mpris2

```
class libqtile.widget.Mpris2 (**config)
An MPRIS 2 widget
```

A widget which displays the current track/artist of your favorite MPRIS player. It should work with all MPRIS 2 compatible players which implement a reasonably correct version of MPRIS, though I have only tested it with audacious. This widget scrolls the text if necessary and information that is displayed is configurable.

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
display_metadata	<code>'xesam:title'</code> , <code>'xesam:album'</code> , <code>'xesam:artist'</code>	Which metadata identifiers to display. See <a href="http://www.freedesktop.org/wiki/Specifications/mpris-spec/metadata/#index5h3">http://www.freedesktop.org/wiki/Specifications/mpris-spec/metadata/#index5h3</a> for available values
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
markup	False	Whether or not to use pango markup
name	'audacious'	Name of the MPRIS widget.
objname	'org.mpris. MediaPlayer2. audacious'	DBUS MPRIS 2 compatible player identifier- Find it out with dbus-monitor - Also see: <a href="http://specifications.freedesktop.org/mpris-spec/latest/#Bus-Name-Policy">http://specifications.freedesktop.org/mpris-spec/latest/#Bus-Name-Policy</a>
padding	None	Padding. Calculated if None.
scroll_chars	30	How many chars at once to display.
scroll_interval	10.5	Scroll delay interval.
scroll_wait_intervals		Wait x scroll_interval before scrolling/removing text
stop_pause_text	None	Optional text to display when in the stopped/paused state

## Net

```
class libqtile.widget.Net (**config)
Displays interface down and up speed
```

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
interface	'wlan0'	The interface to monitor
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
update_interval	11	The update interval.

## NetGraph

```
class libqtile.widget.NetGraph(**config)
```

Display a network usage graph

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
bandwidth_type	'down'	down(load)/up(load)
border_color	'215578'	Widget border color
border_width	2	Widget border width
fill_color	'1667EB.3'	Fill color for linefill graph
frequency	1	Update frequency in seconds
graph_color	'18BAEB'	Graph color
interface	'auto'	Interface to display info for ('auto' for detection)
line_width	3	Line width
margin_x	3	Margin X
margin_y	3	Margin Y
samples	100	Count of graph samples.
start_pos	'bottom'	Drawer starting position ('bottom'/'top')
type	'linefill'	'box', 'line', 'linefill'

## Notify

```
class libqtile.widget.Notify(width=CALCULATED, **config)
```

A notify widget

Supported bar orientations: horizontal only

key	default	description
audiofile	None	Audiofile played during notifications
background	None	Widget background color
default_timeout	None	Default timeout (seconds) for notifications
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
foreground_low	'dddddd'	Foreground low priority colour
foreground_urgent	'ffff0000'	Foreground urgent priority colour
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.

## Pacman

```
class libqtile.widget.Pacman(**config)
```

Shows number of available updates

Needs the pacman package manager installed. So will only work in Arch Linux installation.

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
execute	None	Command to execute on click
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
unavailable	'ffffff'	Unavailable Color - no updates.
update_interval	160	The update interval.

## Pomodoro

```
class libqtile.widget.Pomodoro (**config)
Pomodoro technique widget
```

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
color_active	'00ff00'	Colour then pomodoro is running
color_break	'ffff00'	Colour then it is break time
color_inactive	'ff0000'	Colour then pomodoro is inactive
fmt	'%s'	fmt
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
length_long_break		Length of a long break in minutes
length_pomodori	125	Length of one pomodori in minutes
length_short_break		Length of a short break in minutes
markup	False	Whether or not to use pango markup
notification_onTrue		Turn notifications on
num_pomodori	4	Number of pomodori to do in a cycle
padding	None	Padding. Calculated if None.
prefix_active	''	Prefix then app is active
prefix_break	'B '	Prefix during short break
prefix_inactive	'POMODORO'	Prefix when app is inactive
prefix_long_break	'kB '	Prefix during long break
prefix_paused	'PAUSE'	Prefix during pause
update_interval	11	Update interval in seconds, if none, the widget updates whenever the event loop is idle.

## Prompt

```
class libqtile.widget.Prompt (name='prompt', **config)
A widget that prompts for user input
```

Input should be started using the `.startInput()` method on this class.

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
bell_style	'audible'	Alert at the begin/end of the command history. Possible values: 'audible', 'visual' and None.
cursor	True	Show a cursor
cursor_color	'bef098'	Color for the cursor and text over it.
cursorblink	0.5	Cursor blink rate. 0 to disable.
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
ignore_dups_hist	False	Don't store duplicates in history
markup	False	Whether or not to use pango markup
max_history	100	Commands to keep in history. 0 for no limit.
padding	None	Padding. Calculated if None.
prompt	'{prompt}:'	Text displayed at the prompt
record_history	True	Keep a record of executed commands
visual_bell_color	'ffff0000'	Color for the visual bell (changes prompt background).
visual_bell_time	0.2	Visual bell duration (in seconds).

## Sep

```
class libqtile.widget.Sep(height_percent=None, **config)
A visible widget separator
```

Supported bar orientations: horizontal and vertical

key	default	description
background	None	Widget background color
foreground	'888888'	Separator line colour.
linewidth	1	Width of separator line.
padding	2	Padding on either side of separator.
size_percent	80	Size as a percentage of bar size (0-100).

## She

```
class libqtile.widget.She(**config)
Widget to display the Super Hybrid Engine status
Can display either the mode or CPU speed on eepc computers.
```

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
device	'/sys/devices/platform/eepc/cpufv'	sys path to cpufv
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
format	'speed'	Type of info to display "speed" or "name"
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
update_interval	10.5	Update Time in seconds.

## Spacer

```
class libqtile.widget.Spacer(length=STRETCH, width=None)
```

Just an empty space on the bar

Often used with length equal to bar.STRETCH to push bar widgets to the right or bottom edge of the screen.

### Parameters

**length :** Length of the widget. Can be either bar.STRETCH or a length in pixels.

**width :** DEPRECATED, same as length.

Supported bar orientations: horizontal and vertical

key	default	description
background	None	Widget background color

## StockTicker

```
class libqtile.widget.StockTicker(**config)
```

A stock ticker widget, based on the alphavantage API. Users must acquire an API key from <https://www.alphavantage.co/support/#api-key>

The widget defaults to the TIME\_SERIES\_INTRADAY API function (i.e. stock symbols), but arbitrary Alpha Vantage API queries can be made by passing extra arguments to the constructor.

```
# Display AMZN
widget.StockTicker(apikey=..., symbol="AMZN")

# Display BTC
widget.StockTicker(apikey=..., function="DIGITAL_CURRENCY_INTRADAY", symbol="BTC",
                   market="USD")
```

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
data	None	Post Data
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
function	'TIME_SERIES_INVENTORY'	The default API function to query
headers	{ }	Extra Headers
interval	'1min'	The default latency to query
json	True	Is Json?
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
parse	None	Parse Function
update_interval	1600	Update interval in seconds, if none, the widget updates whenever the event loop is idle.
url	None	Url
user_agent	'Qtile'	Set the user agent
xml	False	Is XML?

## SwapGraph

```
class libqtile.widget.SwapGraph(**config)
```

Display a swap info graph

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
border_color	'215578'	Widget border color
border_width	2	Widget border width
fill_color	'1667EB.3'	Fill color for linefill graph
frequency	1	Update frequency in seconds
graph_color	'18BAEB'	Graph color
line_width	3	Line width
margin_x	3	Margin X
margin_y	3	Margin Y
samples	100	Count of graph samples.
start_pos	'bottom'	Drawer starting position ('bottom'/'top')
type	'linefill'	'box', 'line', 'linefill'

## Systray

```
class libqtile.widget.Systray(**config)
```

A widget that manages system tray

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
icon_size	20	Icon width
padding	5	Padding between icons

## TaskList

`class libqtile.widget.TaskList(**config)`

Displays the icon and name of each window in the current group

Contrary to WindowTabs this is an interactive widget. The window that currently has focus is highlighted.

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
border	'215578'	Border colour
borderwidth	2	Current group border width
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
highlight_method	'border'	Method of highlighting (one of 'border' or 'block') Uses *_border color settings
icon_size	None	Icon size. (Calculated if set to None. Icons are hidden if set to 0.)
markup_floating	None	Text markup of the floating window state. Supports pangomarkup with markup=True.e.g., "{}" or "<span underline="low">{}</span>"
markup.Focused	None	Text markup of the focused window state. Supports pangomarkup with markup=True.e.g., "{}" or "<span underline="low">{}</span>"
markup_maximized	None	Text markup of the maximized window state. Supports pangomarkup with markup=True.e.g., "{}" or "<span underline="low">{}</span>"
markup_minimized	None	Text markup of the minimized window state. Supports pangomarkup with markup=True.e.g., "{}" or "<span underline="low">{}</span>"
markup_normal	None	Text markup of the normal window state. Supports pangomarkup with markup=True.e.g., "{}" or "<span underline="low">{}</span>"
max_title_width	None	Max size in pixels of task title.(if set to None, as much as available.)
rounded	True	To round or not to round borders
spacing	None	Spacing between tasks.(if set to None, will be equal to margin_x)
title_width_method	None	Method to compute the width of task title. (None, 'uniform'.)Defaults to None, the normal behaviour.
txt_floating	'V '	Text representation of the floating window state. e.g., "V " or "
txt_maximized	'[] '	Text representation of the maximized window state. e.g., "[] " or "
txt_minimized	'_ '	Text representation of the minimized window state. e.g., "_" or "
unfocused_border	None	Border color for unfocused windows. Affects only highlight_method 'border' and 'block'. Defaults to None, which means no special color.
urgent_alert_method	'border'	Method for alerting you of WM urgent hints (one of 'border' or 'text')
urgent_border	'FF0000'	Urgent border color

## TextBox

```
class libqtile.widget.TextBox(text=' ', width=CALCULATED, **config)
```

A flexible textbox that can be updated from bound keys, scripts, and qshell

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
font	'sans'	Text font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font pixel size. Calculated if None.
foreground	'#ffffffff'	Foreground colour.
markup	False	Whether or not to use pango markup
padding	None	Padding left and right. Calculated if None.

## ThermalSensor

**class** libqtile.widget.ThermalSensor(\*\*config)

Widget to display temperature sensor information

For using the thermal sensor widget you need to have lm-sensors installed. You can get a list of the tag\_sensors executing “sensors” in your terminal. Then you can choose which you want, otherwise it will display the first available.

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
foreground_alert	#ffff0000	Foreground colour alert
markup	False	Whether or not to use pango markup
metric	True	True to use metric/C, False to use imperial/F
padding	None	Padding. Calculated if None.
show_tag	False	Show tag sensor
tag_sensor	None	Tag of the temperature sensor. For example: “temp1” or “Core 0”
threshold	70	If the current temperature value is above, then change to foreground_alert colour
update_interval	12	Update interval in seconds

## Volume

**class** libqtile.widget.Volume(\*\*config)

Widget that display and change volume

If theme\_path is set it draw widget as icons.

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
cardid	None	Card Id
channel	'Master'	Channel
device	'default'	Device Name
emoji	False	Use emoji to display volume states, only if theme_path is not set. The specified font needs to contain the correct unicode characters.
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
get_volume_command	None	Command to get the current volume
markup	False	Whether or not to use pango markup
mute_command	None	Mute command
padding	3	Padding left and right. Calculated if None.
step	2	Volume change for up and down commands in percentage. Only used if volume_up_command and volume_down_command are not set.
theme_path	None	Path of the icons
update_interval	10.2	Update time in seconds.
volume_app	None	App to control volume
volume_down_command	None	Volume down command
volume_up_command	None	Volume up command

## Wallpaper

```
class libqtile.widget.Wallpaper(**config)
```

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
directory	'~/Pictures/wallpapers/'	Wallpaper Directory
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
label	None	Use a fixed label instead of image name.
markup	False	Whether or not to use pango markup
one_screen	False	Treat the whole X display as one screen when setting wallpapers (does not work if wallpaper_command is set).
padding	None	Padding. Calculated if None.
random_selection	False	If set, use random initial wallpaper and randomly cycle through the wallpapers.
wallpaper	None	Wallpaper
wallpaper_command	None	Wallpaper command

## WindowName

**class** libqtile.widget.WindowName (*width=STRETCH*, \*\*config)

Displays the name of the window that currently has focus

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
for_current_screen	False	instead of this bars screen use currently active screen
foreground	'ffffff'	Foreground colour
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
show_state	True	show window status before window name

## WindowTabs

**class** libqtile.widget.WindowTabs (\*\*config)

Displays the name of each window in the current group. Contrary to TaskList this is not an interactive widget. The window that currently has focus is highlighted.

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
selected	('<', '>')	Selected task indicator
separator	'   '	Task separator text.

## Wlan

**class** libqtile.widget.Wlan (\*\*config)

Displays Wifi ssid and quality

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
disconnected_message	'disconnected'	String to show when the wlan is disconnected.
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'fffffff'	Foreground colour
format	'{essid} {quality}/ 70'	Display format. For percents you can use "{essid} {percent:2.0%}"
interface	'wlan0'	The interface to monitor
markup	False	Whether or not to use pango markup
padding	None	Padding. Calculated if None.
update_interval		The update interval.

## YahooWeather

```
class libqtile.widget.YahooWeather(**config)
A weather widget, data provided by the Yahoo! Weather API.
```

Format options:

- astronomy\_sunrise
- astronomy\_sunset
- atmosphere\_humidity
- atmosphere\_visibility
- atmosphere\_pressure
- atmosphere\_rising
- condition\_text
- condition\_code
- condition\_temp
- condition\_date
- location\_city
- location\_region
- location\_country
- units\_temperature
- units\_distance
- units\_pressure
- units\_speed
- wind\_chill

Supported bar orientations: horizontal only

key	default	description
background	None	Widget background color
data	None	Post Data
down	'v'	symbol for falling atmospheric pressure
font	'sans'	Default font
fontshadow	None	font shadow color, default is None(no shadow)
fontsize	None	Font size. Calculated if None.
foreground	'ffffff'	Foreground colour
format	'{location_city}\n{condition_temp}\n°{units_temperature}'	Display format
headers	{ }	Extra Headers
json	True	Is Json?
location	None	Location to fetch weather for. Ignored if woeid is set.
markup	False	Whether or not to use pango markup
metric	True	True to use metric/C, False to use imperial/F
padding	None	Padding. Calculated if None.
parse	None	Parse Function
steady	's'	symbol for steady atmospheric pressure
up	'^'	symbol for rising atmospheric pressure
update_interval	1600	Update interval in seconds, if none, the widget updates whenever the event loop is idle.
url	None	Url
user_agent	'Qtile'	Set the user agent
woeid	None	Where On Earth ID. Auto-calculated if location is set.
xml	False	Is XML?

#### 4.1.5 Built-in Extensions

##### Dmenu

```
class libqtile.extension.Dmenu(**config)
Python wrapper for dmenu http://tools.suckless.org/dmenu/
```

key	default	description
background	None	defines the normal background color
command	None	the command to be launched (string or list with arguments)
dmenu_bottom	False	dmenu appears at the bottom of the screen
dmenu_command	'dmenu'	the dmenu command to be launched
dmenu_font	None	override the default 'font' and 'fontsize' options for dmenu
dmenu_height	None	defines the height (only supported by some dmenu forks)
dmenu_ignorecase	False	dmenu matches menu items case insensitively
dmenu_lines	None	dmenu lists items vertically, with the given number of lines
dmenu_prompt	None	defines the prompt to be displayed to the left of the input field
font	'sans'	defines the font name to be used
fontsize	None	defines the font size to be used
foreground	None	defines the normal foreground color
selected_background	None	defines the selected background color
selected_foreground	None	defines the selected foreground color

## DmenuRun

```
class libqtile.extension.DmenuRun (**config)
    Special case to run applications.
```

config.py should have something like:

```
from libqtile import extension
keys = [
    Key(['mod4'], 'r', lazy.run_extension(extension.DmenuRun(
        dmenu_prompt=">",
        dmenu_font="Andika-8",
        background="#15181a",
        foreground="#00ff00",
        selected_background="#079822",
        selected_foreground="#ffff",
        dmenu_height=24, # Only supported by some dmenu forks
    ))),
]
```

key	default	description
background	None	defines the normal background color
command	None	the command to be launched (string or list with arguments)
dmenu_bottom	False	dmenu appears at the bottom of the screen
dmenu_command	'dmenu_run'	the dmenu command to be launched
dmenu_font	None	override the default 'font' and 'fontsize' options for dmenu
dmenu_height	None	defines the height (only supported by some dmenu forks)
dmenu_ignorecase	False	dmenu matches menu items case insensitively
dmenu_lines	None	dmenu lists items vertically, with the given number of lines
dmenu_prompt	None	defines the prompt to be displayed to the left of the input field
font	'sans'	defines the font name to be used
fontsize	None	defines the font size to be used
foreground	None	defines the normal foreground color
selected_background	None	defines the selected background color
selected_foreground	None	defines the selected foreground color

## J4DmenuDesktop

```
class libqtile.extension.J4DmenuDesktop (**config)
    Python wrapper for j4-dmenu-desktop https://github.com/enkore/j4-dmenu-desktop
```

key	default	description
background	None	defines the normal background color
command	None	the command to be launched (string or list with arguments)
dmenu_bottom	False	dmenu appears at the bottom of the screen
dmenu_command	'dmenu'	the dmenu command to be launched
dmenu_font	None	override the default 'font' and 'fontsize' options for dmenu
dmenu_height	None	defines the height (only supported by some dmenu forks)
dmenu_ignorecase	False	dmenu matches menu items case insensitively
dmenu_lines	None	dmenu lists items vertically, with the given number of lines
dmenu_prompt	None	defines the prompt to be displayed to the left of the input field
font	'sans'	defines the font name to be used
fontsize	None	defines the font size to be used
foreground	None	defines the normal foreground color
j4dmenu_command	j4-dmenu-deskt... the dmenu command to be launched	
j4dmenu_display	False	display binary name after each entry
j4dmenu_generic	True	include the generic name of desktop entries
j4dmenu_terminal	None	terminal emulator used to start terminal apps
j4dmenu_usage_file	None	file used to sort items by usage frequency
j4dmenu_use_xdg	False	read \$XDG_CURRENT_DESKTOP to determine the desktop environment
selected_background	None	defines the selected background color
selected_foreground	None	defines the selected foreground color

## RunCommand

```
class libqtile.extension.RunCommand(**config)
Run an arbitrary command.
```

Mostly useful as a superclass for more specific extensions that need to interact with the qtile object.

Also consider simply using lazy.spawn() or writing a [client](#).

key	default	description
background	None	defines the normal background color
command	None	the command to be launched (string or list with arguments)
font	'sans'	defines the font name to be used
fontsize	None	defines the font size to be used
foreground	None	defines the normal foreground color
selected_background	None	defines the selected background color
selected_foreground	None	defines the selected foreground color

## WindowList

```
class libqtile.extension.WindowList(**config)
Give vertical list of all open windows in dmenu. Switch to selected.
```

key	default	description
all_groups	True	If True, list windows from all groups; otherwise only from the current group
background	None	defines the normal background color
command	None	the command to be launched (string or list with arguments)
dmenu_bottom	False	dmenu appears at the bottom of the screen
dmenu_command	'dmenu'	the dmenu command to be launched
dmenu_font	None	override the default 'font' and 'fontsize' options for dmenu
dmenu_height	None	defines the height (only supported by some dmenu forks)
dmenu_ignorecase	False	dmenu matches menu items case insensitively
dmenu_lines	None	dmenu lists items vertically, with the given number of lines
dmenu_prompt	None	defines the prompt to be displayed to the left of the input field
font	'sans'	defines the font name to be used
fontsize	None	defines the font size to be used
foreground	None	defines the normal foreground color
item_format	'{group} . {id}: {window}'	the format for the menu items
selected_background	None	defines the selected background color
selected_foreground	None	defines the selected foreground color

## 4.2 Frequently Asked Questions

### 4.2.1 Why the name Qtile?

Users often wonder, why the Q? Does it have something to do with Qt? No. Below is an IRC excerpt where cortesi explains the great trial that ultimately brought Qtile into existence, thanks to the benevolence of the Open Source Gods. Praise be to the OSG!

```
ramnes: what does Qtile mean?
ramnes: what's the Q?
@tych0: ramnes: it doesn't :(
@tych0: cortesi was just looking for the first letter that wasn't registered
      in a domain name with "tile" as a suffix
@tych0: qtile it was :)
cortesi: tych0, dx: we really should have something more compelling to
      explain the name. one day i was swimming at manly beach in sydney,
      where i lived at the time. suddenly, i saw an enormous great white
      right beside me. it went for my leg with massive, gaping jaws, but
      quick as a flash, i thumb-punched it in both eyes. when it reared
      back in agony, i saw that it had a jagged, gnarly scar on its
      stomach... a scar shaped like the letter "Q".
cortesi: while it was distracted, i surfed a wave to shore. i knew that i
      had to dedicate my next open source project to the ocean gods, in
      thanks for my lucky escape. and thus, qtile got its name...
```

### 4.2.2 When I first start xterm/urxvt/rxvt containing an instance of Vim, I see text and layout corruption. What gives?

Vim is not handling terminal resizes correctly. You can fix the problem by starting your xterm with the “-wf” option, like so:

```
xterm -wf -e vim
```

Alternatively, you can just cycle through your layouts a few times, which usually seems to fix it.

### 4.2.3 How do I know which modifier specification maps to which key?

To see a list of modifier names and their matching keys, use the `xmodmap` command. On my system, the output looks like this:

```
$ xmodmap
xmodmap: up to 3 keys per modifier, (keycodes in parentheses):

shift      Shift_L (0x32),  Shift_R (0x3e)
lock       Caps_Lock (0x9)
control    Control_L (0x25),  Control_R (0x69)
mod1       Alt_L (0x40),  Alt_R (0x6c),  Meta_L (0xcd)
mod2       Num_Lock (0x4d)
mod3
mod4       Super_L (0xce),  Hyper_L (0xcf)
mod5       ISO_Level3_Shift (0x5c),  Mode_switch (0xcb)
```

### 4.2.4 My “pointer mouse cursor” isn’t the one I expect it to be!

Qtile should set the default cursor to `left_ptr`, you must install `xcb-util-cursor` if you want support for themed cursors.

### 4.2.5 LibreOffice menus don’t appear or don’t stay visible

A workaround for problem with the mouse in libreoffice is setting the environment variable `»SAL_USE_VCLPLUGIN=gen«`. It is dependet on your system configuration where to do this. e.g. Arch-Linux with libreoffice-fresh in `/etc/profile.d/libreoffice-fresh.sh`.

## 4.3 License

This project is distributed under the MIT license.

Copyright (c) 2008, Aldo Cortesi All rights reserved.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the “Software”), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED “AS IS”, WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

- genindex



---

## Index

---

### A

addgroup() (libqtile.hook.subscribe class method), 48  
AGroupBox (class in libqtile.widget), 62

### B

Backlight (class in libqtile.widget), 62  
Bar (class in libqtile.bar), 15  
Battery (class in libqtile.widget), 63  
BatteryIcon (class in libqtile.widget), 64  
BitcoinTicker (class in libqtile.widget), 65  
Bsp (class in libqtile.layout.bsp), 52

### C

Canto (class in libqtile.widget), 66  
change\_group() (libqtile.hook.subscribe class method), 48  
CheckUpdates (class in libqtile.widget), 67  
Click (class in libqtile.config), 14  
Client (class in libqtile.command), 24  
client\_focus() (libqtile.hook.subscribe class method), 48  
client\_killed() (libqtile.hook.subscribe class method), 48  
client\_managed() (libqtile.hook.subscribe class method), 48  
client\_mouse\_enter() (libqtile.hook.subscribe class method), 48  
client\_name\_updated() (libqtile.hook.subscribe class method), 48  
client\_new() (libqtile.hook.subscribe class method), 49  
client\_state\_changed() (libqtile.hook.subscribe class method), 49  
client\_type\_changed() (libqtile.hook.subscribe class method), 49  
client\_urgent\_hint\_changed() (libqtile.hook.subscribe class method), 49  
Clipboard (class in libqtile.widget), 67  
Clock (class in libqtile.widget), 68  
cmd\_add\_rule() (libqtile.manager.Qtile method), 39  
cmd\_addgroup() (libqtile.manager.Qtile method), 39  
cmd\_bring\_to\_front() (libqtile.window.Window method), 46

cmd\_commands() (libqtile.bar.Bar method), 43  
cmd\_commands() (libqtile.config.Screen method), 45  
cmd\_commands() (libqtile.manager.Qtile method), 39  
cmd\_commands() (libqtile.window.Window method), 46  
cmd\_critical() (libqtile.manager.Qtile method), 39  
cmd\_debug() (libqtile.manager.Qtile method), 39  
cmd\_delgroup() (libqtile.manager.Qtile method), 40  
cmd\_disable\_floating() (libqtile.window.Window method), 46  
cmd\_disable\_fullscreen() (libqtile.window.Window method), 46  
cmd\_disable\_maximize() (libqtile.window.Window method), 46  
cmd\_disable\_minimize() (libqtile.window.Window method), 46  
cmd\_display\_kb() (libqtile.manager.Qtile method), 40  
cmd\_doc() (libqtile.bar.Bar method), 44  
cmd\_doc() (libqtile.config.Screen method), 45  
cmd\_doc() (libqtile.manager.Qtile method), 40  
cmd\_doc() (libqtile.window.Window method), 46  
cmd\_down\_opacity() (libqtile.window.Window method), 46  
cmd\_enable\_floating() (libqtile.window.Window method), 46  
cmd\_enable\_fullscreen() (libqtile.window.Window method), 46  
cmd\_enable\_maximize() (libqtile.window.Window method), 46  
cmd\_enable\_minimize() (libqtile.window.Window method), 46  
cmd\_error() (libqtile.manager.Qtile method), 40  
cmd\_eval() (libqtile.bar.Bar method), 44  
cmd\_eval() (libqtile.config.Screen method), 45  
cmd\_eval() (libqtile.manager.Qtile method), 40  
cmd\_eval() (libqtile.window.Window method), 46  
cmd\_fake\_button\_press() (libqtile.bar.Bar method), 44  
cmd\_findwindow() (libqtile.manager.Qtile method), 40  
cmd\_focus() (libqtile.window.Window method), 46  
cmd\_focus\_by\_click() (libqtile.manager.Qtile method), 40

cmd\_function() (libqtile.bar.Bar method), 44  
 cmd\_function() (libqtile.config.Screen method), 45  
 cmd\_function() (libqtile.manager.Qtile method), 40  
 cmd\_function() (libqtile.window.Window method), 46  
 cmd\_get\_info() (libqtile.manager.Qtile method), 40  
 cmd\_get\_position() (libqtile.window.Window method), 46  
 cmd\_get\_size() (libqtile.window.Window method), 46  
 cmd\_get\_state() (libqtile.manager.Qtile method), 40  
 cmd\_get\_test\_data() (libqtile.manager.Qtile method), 40  
 cmd\_groups() (libqtile.manager.Qtile method), 40  
 cmd\_hide\_show\_bar() (libqtile.manager.Qtile method), 40  
 cmd\_info() (libqtile.bar.Bar method), 44  
 cmd\_info() (libqtile.config.Screen method), 45  
 cmd\_info() (libqtile.manager.Qtile method), 40  
 cmd\_info() (libqtile.window.Window method), 46  
 cmd\_inspect() (libqtile.window.Window method), 47  
 cmd\_internal\_windows() (libqtile.manager.Qtile method), 41  
 cmd\_items() (libqtile.bar.Bar method), 44  
 cmd\_items() (libqtile.config.Screen method), 45  
 cmd\_items() (libqtile.manager.Qtile method), 41  
 cmd\_items() (libqtile.window.Window method), 47  
 cmd\_kill() (libqtile.window.Window method), 47  
 cmd\_list\_widgets() (libqtile.manager.Qtile method), 41  
 cmd\_match() (libqtile.window.Window method), 47  
 cmd\_move\_floating() (libqtile.window.Window method), 47  
 cmd\_next\_group() (libqtile.config.Screen method), 45  
 cmd\_next\_layout() (libqtile.manager.Qtile method), 41  
 cmd\_next\_screen() (libqtile.manager.Qtile method), 41  
 cmd\_next\_urgent() (libqtile.manager.Qtile method), 41  
 cmd\_opacity() (libqtile.window.Window method), 47  
 cmd\_pause() (libqtile.manager.Qtile method), 41  
 cmd\_prev\_group() (libqtile.config.Screen method), 45  
 cmd\_prev\_layout() (libqtile.manager.Qtile method), 41  
 cmd\_prev\_screen() (libqtile.manager.Qtile method), 41  
 cmd\_qtile\_info() (libqtile.manager.Qtile method), 41  
 cmd\_qtilecmd() (libqtile.manager.Qtile method), 41  
 cmd\_remove\_rule() (libqtile.manager.Qtile method), 41  
 cmd\_resize() (libqtile.config.Screen method), 46  
 cmd\_resize\_floating() (libqtile.window.Window method), 47  
 cmd\_restart() (libqtile.manager.Qtile method), 41  
 cmd\_run\_extension() (libqtile.manager.Qtile method), 41  
 cmd\_run\_extention() (libqtile.manager.Qtile method), 41  
 cmd\_run\_external() (libqtile.manager.Qtile method), 42  
 cmd\_screens() (libqtile.manager.Qtile method), 42  
 cmd\_set\_position() (libqtile.window.Window method), 47  
 cmd\_set\_position\_floating() (libqtile.window.Window method), 47  
 cmd\_set\_size\_floating() (libqtile.window.Window method), 47  
 cmd\_shutdown() (libqtile.manager.Qtile method), 42  
 cmd\_simulate\_keypress() (libqtile.manager.Qtile method), 42  
 cmd\_spawn() (libqtile.manager.Qtile method), 42  
 cmd\_spawnncmd() (libqtile.manager.Qtile method), 42  
 cmd\_static() (libqtile.window.Window method), 47  
 cmd\_status() (libqtile.manager.Qtile method), 42  
 cmd\_switch\_groups() (libqtile.manager.Qtile method), 42  
 cmd\_switchgroup() (libqtile.manager.Qtile method), 42  
 cmd\_sync() (libqtile.manager.Qtile method), 43  
 cmd\_to\_layout\_index() (libqtile.manager.Qtile method), 43  
 cmd\_to\_screen() (libqtile.manager.Qtile method), 43  
 cmd\_toggle\_floating() (libqtile.window.Window method), 47  
 cmd\_toggle\_fullscreen() (libqtile.window.Window method), 47  
 cmd\_toggle\_group() (libqtile.config.Screen method), 46  
 cmd\_toggle\_maximize() (libqtile.window.Window method), 47  
 cmd\_toggle\_minimize() (libqtile.window.Window method), 47  
 cmd\_togglegroup() (libqtile.config.Screen method), 46  
 cmd\_togroup() (libqtile.manager.Qtile method), 43  
 cmd\_togroup() (libqtile.window.Window method), 47  
 cmd\_toscreen() (libqtile.window.Window method), 47  
 cmd\_tracemalloc\_dump() (libqtile.manager.Qtile method), 43  
 cmd\_tracemalloc\_toggle() (libqtile.manager.Qtile method), 43  
 cmd\_up\_opacity() (libqtile.window.Window method), 48  
 cmd\_warning() (libqtile.manager.Qtile method), 43  
 cmd\_windows() (libqtile.manager.Qtile method), 43  
 Cmus (class in libqtile.widget), 68  
 Columns (class in libqtile.layout.columns), 52  
 Countdown (class in libqtile.widget), 69  
 CPUGraph (class in libqtile.widget), 66  
 current\_screen\_change() (libqtile.hook.subscribe class method), 49  
 CurrentLayout (class in libqtile.widget), 69  
 CurrentLayoutIcon (class in libqtile.widget), 70  
 CurrentScreen (class in libqtile.widget), 70

## D

DebugInfo (class in libqtile.widget), 71  
 delgroup() (libqtile.hook.subscribe class method), 49  
 DF (class in libqtile.widget), 71  
 Dmenu (class in libqtile.extension), 96  
 DmenuRun (class in libqtile.extension), 97  
 do\_cd() (libqtile.sh.QSh method), 25  
 do\_exit() (libqtile.sh.QSh method), 26  
 do\_help() (libqtile.sh.QSh method), 26

do\_ls() (libqtile.sh.QSh method), 26  
 do\_pwd() (libqtile.sh.QSh method), 26  
 Drag (class in libqtile.config), 14  
 DropDown (class in libqtile.config), 10

**E**

EzConfig (class in libqtile.config), 13

**F**

float\_change() (libqtile.hook.subscribe class method), 49  
 Floating (class in libqtile.layout.floating), 51  
 focus\_change() (libqtile.hook.subscribe class method), 50

**G**

Gap (class in libqtile.bar), 16  
 GenPollText (class in libqtile.widget), 71  
 GenPollUrl (class in libqtile.widget), 72  
 GmailChecker (class in libqtile.widget), 72  
 Group (class in libqtile.config), 8  
 group\_window\_add() (libqtile.hook.subscribe class method), 50  
 GroupBox (class in libqtile.widget), 73

**H**

HDDBusyGraph (class in libqtile.widget), 74  
 HDDGraph (class in libqtile.widget), 75

**I**

IdleRPG (class in libqtile.widget), 75  
 Image (class in libqtile.widget), 76  
 ImapWidget (class in libqtile.widget), 76

**J**

J4DmenuDesktop (class in libqtile.extension), 97

**K**

Key (class in libqtile.config), 12  
 KeyboardKbdd (class in libqtile.widget), 77  
 KeyboardLayout (class in libqtile.widget), 78  
 KhalCalendar (class in libqtile.widget), 78

**L**

LaunchBar (class in libqtile.widget), 78  
 layout\_change() (libqtile.hook.subscribe class method), 50

**M**

Maildir (class in libqtile.widget), 79  
 Match (class in libqtile.config), 9  
 Matrix (class in libqtile.layout.matrix), 53  
 Max (class in libqtile.layout.max), 53  
 Memory (class in libqtile.widget), 79  
 MemoryGraph (class in libqtile.widget), 80

Moc (class in libqtile.widget), 80  
 MonadTall (class in libqtile.layout.xmonad), 54  
 MonadWide (class in libqtile.layout.xmonad), 55  
 Mpd (class in libqtile.widget), 81  
 Mpd2 (class in libqtile.widget), 82  
 Mpris (class in libqtile.widget), 83  
 Mpris2 (class in libqtile.widget), 84

**N**

Net (class in libqtile.widget), 84  
 net\_wm\_icon\_change() (libqtile.hook.subscribe class method), 50  
 NetGraph (class in libqtile.widget), 85  
 Notify (class in libqtile.widget), 85

**P**

Pacman (class in libqtile.widget), 85  
 Pomodoro (class in libqtile.widget), 86  
 Prompt (class in libqtile.widget), 86

**Q**

QSh (class in libqtile.sh), 25  
 Qtile (class in libqtile.manager), 39

**R**

RatioTile (class in libqtile.layout.ratiotile), 57  
 Rule (class in libqtile.config), 9  
 RunCommand (class in libqtile.extension), 98

**S**

ScratchPad (class in libqtile.config), 10  
 Screen (class in libqtile.config), 15  
 screen\_change() (libqtile.hook.subscribe class method), 50  
 selection\_change() (libqtile.hook.subscribe class method), 50  
 selection\_notify() (libqtile.hook.subscribe class method), 50  
 Sep (class in libqtile.widget), 87  
 setgroup() (libqtile.hook.subscribe class method), 51  
 She (class in libqtile.widget), 87  
 simple\_key\_binder() (in module libqtile.dgroups), 8  
 Slice (class in libqtile.layout.slice), 58  
 Spacer (class in libqtile.widget), 88  
 Stack (class in libqtile.layout.stack), 58  
 startup() (libqtile.hook.subscribe class method), 51  
 startup\_complete() (libqtile.hook.subscribe class method), 51  
 startup\_once() (libqtile.hook.subscribe class method), 51  
 StockTicker (class in libqtile.widget), 88  
 SwapGraph (class in libqtile.widget), 89  
 Systray (class in libqtile.widget), 89

## T

TaskList (class in libqtile.widget), 90  
TextBox (class in libqtile.widget), 91  
ThermalSensor (class in libqtile.widget), 92  
Tile (class in libqtile.layout.tile), 59  
TreeTab (class in libqtile.layout.tree), 59

## V

VerticalTile (class in libqtile.layout.verticaltile), 60  
Volume (class in libqtile.widget), 92

## W

Wallpaper (class in libqtile.widget), 93  
Window (class in libqtile.window), 46  
window\_name\_change() (libqtile.hook.subscribe class method), 51  
WindowList (class in libqtile.extension), 98  
WindowName (class in libqtile.widget), 94  
WindowTabs (class in libqtile.widget), 94  
Wlan (class in libqtile.widget), 94  
Wmii (class in libqtile.layout.wmii), 61

## Y

YahooWeather (class in libqtile.widget), 95

## Z

Zoomy (class in libqtile.layout.zoomy), 62